# LED cabinet light strip
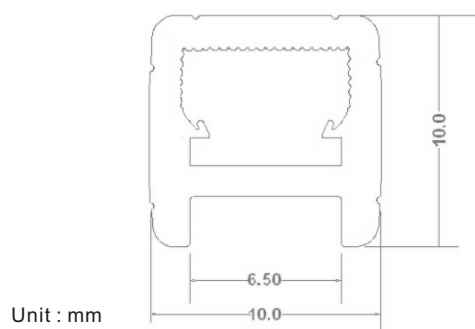
Model : CBL-P1010-S1210-89A

Features:

* Slim size 13mm(H) x 10mm(W)
* Exceptional even illumination (LED spot not seen)
* 270 degree (3 - sectional) lighting output
* Ideal for both direct or indirect light effect
* Minimum cutting width < 3mm
* Thermal conductive plastic to maximize heat dissipation
* Installation in serial for seamless lighting output
* SPM design - Power circuit protection to cut off individual LEDs when mal-fucntioned.
* CRI > 93
* High lumen output 80lm/w
* other options : dimmable & color temperature change

Application:

* Kitchen cabinet
* Bathroom cabinet
* Closet
* Show cabinet
* Retail chop
* & many other applications as appropriate

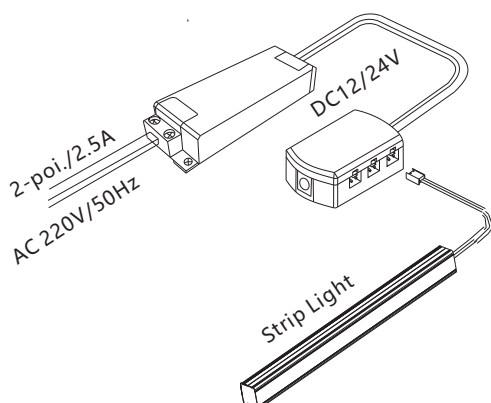Model : CBL-P1010-S1210-89A

Unit : mm

Standards

|	
Standard Dim(mm)	Ø1200*10*10mm
Material	PC
Power (W)	10W in 1.2m
Voltage(V)	DC12V/DC24V
Beam angle:	270 degree
Luminous efficacy	80 lm/W
Color Temp	2700K~6500K
CRI	>93
Power factor	> 0.95
Life Span (Hrs)	up to 50,000 hours
Operating Temperature	-20°C~45°C
IP Grade	IP 54

Description: male plug

Description: female socket

Description: DC male plug

Description: 6-way distributor

www.ilighting.com.hk

NO : 3-1

Room B3, 18/F Bonsun Industrial Building, 364-366 Sha Tsui Road, Tsuen Wan. Hong Kong.

Phone: 852-35863418   Fax: 852-35440462   info@ilighting.com.hk