

LED Shoot the Light


Model : IMR16-A03-N108E

Features:

iLIGHTING
Green • Professional



Model : IMR16-A03-108E

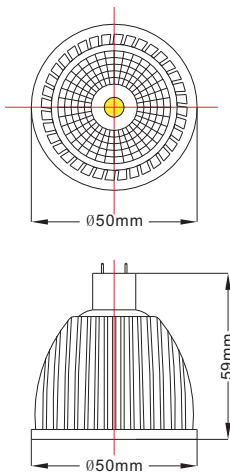

Standard

Standard Size(mm)	Ø50*59mm
Voltage (V)	AC/DC24V
Beam Angle	60 degree
CRI	>80Ra
Luminous Efficacy	100 lm/w
Power Factor	> 0.90
Power (W)	3W
Cover Material	Aluminum , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)

Lighting Source

LED Shoot the Light

Model : IMR16-A07-N108E


Features:



Lighting Source



Model : IMR16-A07-N108E

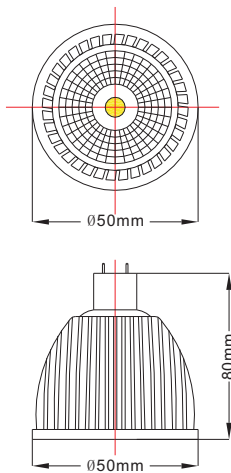

Standard

Standard Size(mm)	Ø50*80mm
Voltage (V)	AC/DC24V
Beam Angle	60 degree
CRI	>80Ra
Luminous Efficacy	100 lm/w
Power Factor	> 0.90
Power (W)	7W
Cover Material	Aluminum , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)

LED Shoot the Light

Model : IMR16-B05-H108E

Features:

iLIGHTING
Green • Professional





Model : IMR16-B05-H108E

Lighting Source

Standard

Standard Size(mm)	Ø50*65mm
Voltage (V)	AC/DC24V
Beam Angle	60 degree
CRI	>80Ra
Luminous Efficacy	100 lm/w
Power Factor	> 0.90
Power (W)	5W
Cover Material	Aluminum , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)



LED MR16 lamp



Model : IMR16-A05-H108E

Features:

- 1.adopts high heat-conducting aluminum for heat dissipation
- 2.high-power high lumen efficiency LED as the light source



Model : IMR16-A05-H108E



Standard

Standard Size(mm)	Ø50*65mm
Voltage (V)	AC/DC24V
Beam Angle	60 degree
CRI	>80Ra
Luminous Efficacy	100 lm/w
Power Factor	> 0.90
Power (W)	5W
Cover Material	Aluminum , Acrylic
Color Temperature	3000K