

LED High Bay Light



Model : HB-A700-H118

Features:

- *New design with lighter weight, and better heat dissipation
More stable quality, Easy to install
- *Angle locking design to ensure angle unchanged after prolong use

Environment:


- *Using the latest technology of heat radiation structure,
For longer product life
- *Installation options by pedestal, pendant, pole, Chain, Bracket etc
- *Available in 700W
- *IP 65 protection level
- *High luminous efficacy 110lm



Model:HB-A700-H118

Standard

Dimension	489*464*500mm
Voltage (V)	AC110~265V
Beam Angle	60/90/120 degree
CRI	>80Ra
Luminous Efficacy	110 lm/w
Power Factor	> 0.90
Power (W)	700W
Material	AL 6063
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 65

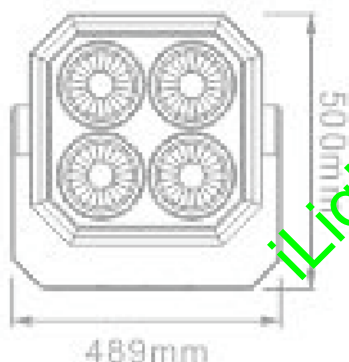

LED High Bay Light

Model : HB-A1000-H118

Features:

- *New design with lighter weight, and better heat dissipation
More stable quality, Easy to install
- *Angle locking design to ensure angle unchanged after prolong use


Environment:

- *Using the latest technology of heat radiation structure,
For longer product life
- *Installation options by pedestal, pendant, pole, Chain, Bracket etc
- *Available in 1000W
- *IP 65 protection level
- *High luminous efficacy 105lm

iLIGHTING[®]
Green • Professional



Model:HB-A1000-H118

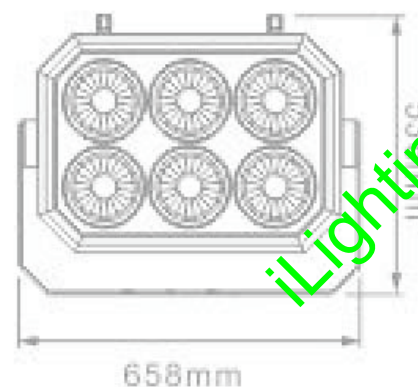

Standard

Dimension	658*464*536mm
Voltage (V)	AC110~265V
Beam Angle	60/90/120 degree
CRI	>80Ra
Luminous Efficacy	105lm/w
Power Factor	> 0.90
Power (W)	1000W
Material	AL 6063
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 65

LED High Bay Light



Model : HB-A1500-H118

Features:


- *New design with lighter weight, and better heat dissipation
More stable quality, Easy to install
- *Angle locking design to ensure angle unchanged after prolong use

Environment:

- *Using the latest technology of heat radiation structure,
For longer product life
- *Installation options by pedestal, pendant, pole, Chain, Bracket etc
- *Available in 1500W
- *IP 65 protection level
- *High luminous efficacy 105lm



Model:HB-A1500-H118

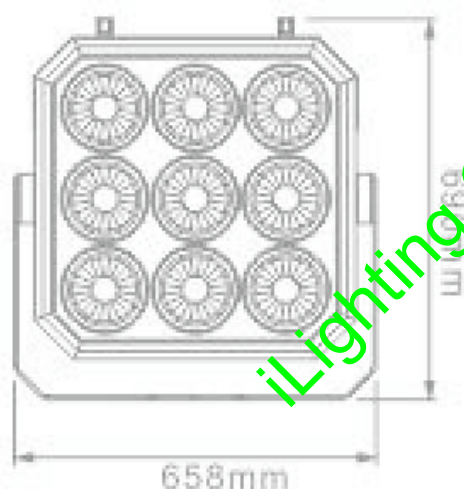

Standard

Dimension	658*464*690mm
Voltage (V)	AC110~265V
Beam Angle	60/90/120 degree
CRI	>80Ra
Luminous Efficacy	105lm/w
Power Factor	> 0.90
Power (W)	1000W
Material	AL 6063
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 65

LED High Bay Light



Model : HB-A300-H128

Features:

- *New design with lighter weight, and better heat dissipation
More stable quality, Easy to install
- *Angle locking design to ensure angle unchanged after prolong use

Environment:


- *Using the latest technology of heat radiation structure,
For longer product life
- *Installation options by pedestal, pendant, pole, Chain, Bracket etc
- *Available in 300W
- *IP 65 protection level
- *High luminous efficacy 120lm



Model:HB-A300-H128

Standard

Dimension	658*325*290mm
Voltage (V)	AC110~265V
Beam Angle	60/90/120 degree
CRI	>80Ra
Luminous Efficacy	120lm/w
Power Factor	> 0.90
Power (W)	300W
Material	AL 6063
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 65

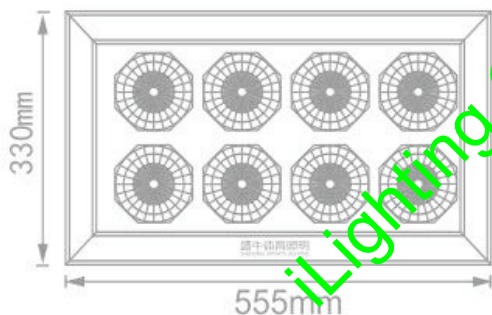

LED High Bay Light



Lighting Source

Model : HB-A500-H128

Features:


- *New design with lighter weight, and better heat dissipation
More stable quality, Easy to install
- *Angle locking design to ensure angle unchanged after prolong use

Environment:

- *Using the latest technology of heat radiation structure,
For longer product life
- *Installation options by pedestal, pendant, pole, Chain, Bracket etc
- *Available in 500W
- *IP 65 protection level
- *High luminous efficacy 120lm



Model:HB-A500-H128

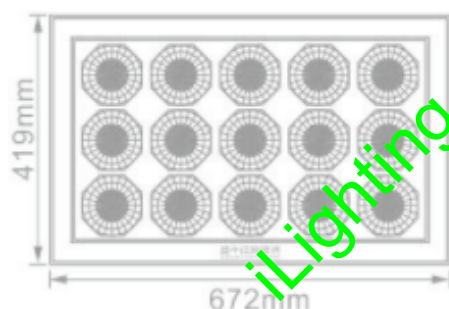

Standard

Dimension	632*460*200mm
Voltage (V)	AC110~265V
Beam Angle	60/90/120 degree
CRI	>80Ra
Luminous Efficacy	120lm/w
Power Factor	> 0.90
Power (W)	500W
Material	AL 6063
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 65

LED High Bay Light



Model : HB-A200-H108

Features:


- *New design with lighter weight, and better heat dissipation
More stable quality, Easy to install
- *Angle locking design to ensure angle unchanged after prolong use

Environment:

- *Using the latest technology of heat radiation structure,
For longer product life
- *Installation options by pedestal, pendant, pole, Chain, Bracket etc
- *Available in 200W
- *IP 65 protection level
- *High luminous efficacy 100lm



Model:HB-A200-H108

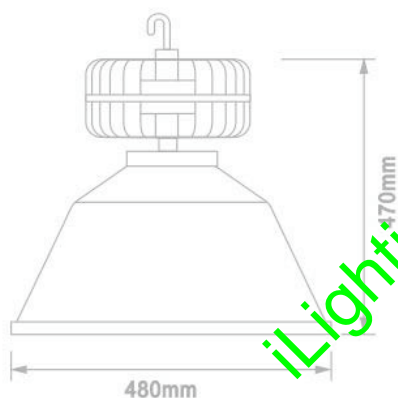

Standard

Dimension	658mm*476mm
Voltage (V)	AC110~265V
Beam Angle	60/90/120 degree
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	200W
Material	AL 6063
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 65

LED High Bay Light



Model : HB-A150-H128

Features:

- *New design with lighter weight, and better heat dissipation
More stable quality, Easy to install
- *Angle locking design to ensure angle unchanged after prolong use

Environment:


- *Using the latest technology of heat radiation structure,
For longer product life
- *Installation options by pedestal, pendant, pole, Chain, Bracket etc
- *Available in 150W
- *IP 65 protection level
- *High luminous efficacy 120lm



Model:HB-A150-H128

Standard

Dimension	653mm*540mm*150mm
Voltage (V)	AC110~265V
Beam Angle	60/90/120 degree
CRI	>80Ra
Luminous Efficacy	120lm/w
Power Factor	> 0.90
Power (W)	150W
Material	AL 6063
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 65

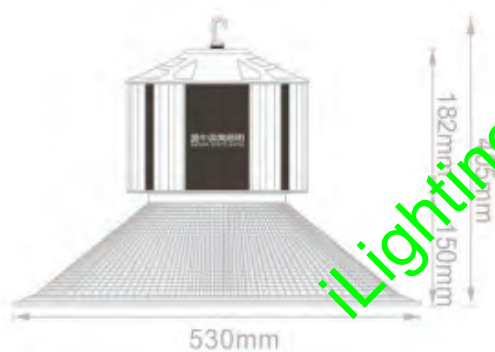

LED High Bay Light

Model : HB-A250-H108

Features:


- *New design with lighter weight, and better heat dissipation
More stable quality, Easy to install
- *Angle locking design to ensure angle unchanged after prolong use

Environment:

- *Using the latest technology of heat radiation structure,
For longer product life
- *Installation options by pedestal, pendant, pole, Chain, Bracket etc
- *Available in 250W
- *IP 65 protection level
- *High luminous efficacy 100lm



Model:HB-A250-H108

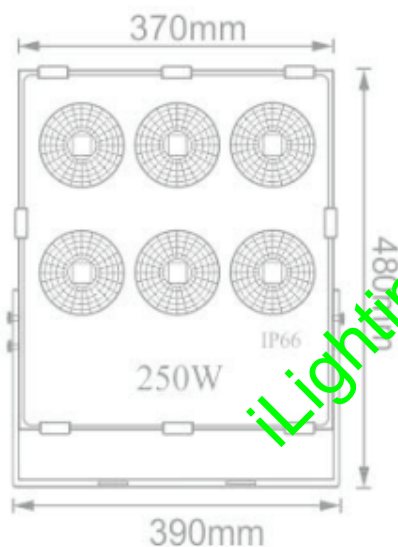

Standard

Dimension	355*350*100mm
Voltage (V)	AC110~265V
Beam Angle	60/90/120 degree
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	250W
Material	AL 6063
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 65

LED High Bay Light



Lighting Source

Model : HB-A300-H108

Features:


- *New design with lighter weight, and better heat dissipation
More stable quality, Easy to install
- *Angle locking design to ensure angle unchanged after prolong use

Environment:

- *Using the latest technology of heat radiation structure,
For longer product life
- *Installation options by pedestal, pendant, pole, Chain, Bracket etc
- *Available in 300W
- *IP 65 protection level
- *High luminous efficacy 100lm



Model:HB-A300-H108

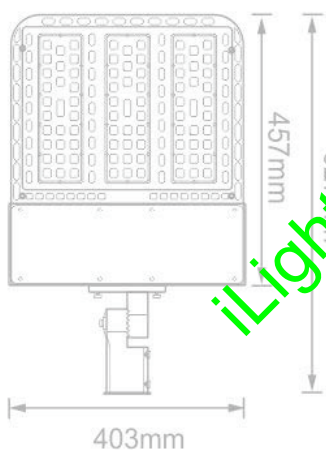

Standard

Dimension	628*403*62mm
Voltage (V)	AC110~265V
Beam Angle	60/90/120 degree
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	300W
Material	AL 6063
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 65

LED High Bay Light



Model : HB-A200-H108

Features:


- *New design with lighter weight, and better heat dissipation
More stable quality, Easy to install
- *Angle locking design to ensure angle unchanged after prolong use

Environment:

- *Using the latest technology of heat radiation structure,
For longer product life
- *Installation options by pedestal, pendant, pole, Chain, Bracket etc
- *Available in 200W
- *IP 65 protection level
- *High luminous efficacy 100lm



Model:HB-A200-H108

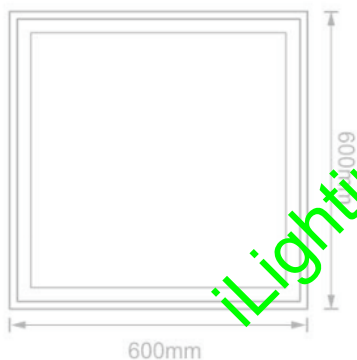

Standard

Dimension	600*600*60mm
Voltage (V)	AC110~265V
Beam Angle	90 degree
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	200W
Material	AL 6063
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	Ip54