


Explosion Proof Light

Model : EP-GMD22-H118E

Features:



Model : EP-GMD22-118E

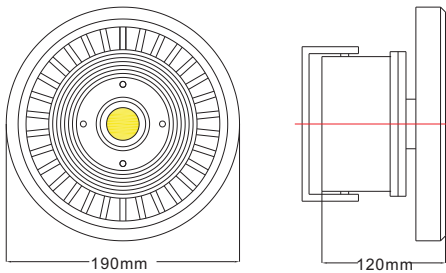

Standard

Standard Size(mm)	190*120mm
Voltage (V)	AC85~265V
Explosion proof Grade	Exd II CT6
Anticorrosive Garde	WF 2
CRI	>80Ra
Luminous Efficacy	110lm/w
Power Factor	> 0.90
Power (W)	22W
Color Temperature	2700K-6500K
Installation Height	4-8m
working Height	3-6m
Life Time	50,000(H)
IP Grade	IP 66


Explosion Proof Light

Model : EP-GMD30-H118E

Features:



Model : EP-GMD30-H118E

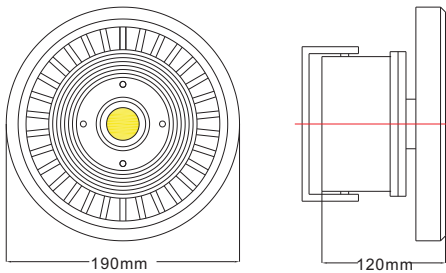

Standard

Standard Size(mm)	190*120mm
Voltage (V)	AC85~265V
Explosion proof Grade	Exd II CT6
Anticorrosive Garde	WF 2
CRI	>80Ra
Luminous Efficacy	110lm/w
Power Factor	> 0.90
Power (W)	30W
Color Temperature	2700K-6500K
Installation Height	4-8m
working Height	3-6m
Life Time	50,000(H)
IP Grade	IP 66


Explosion Proof Light

Model : EP-GMD50-H108E

Features:



Model : EP-GMD50-H108E

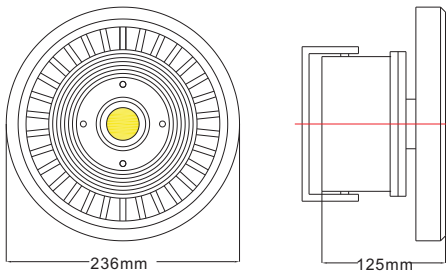

Standard

Standard Size(mm)	236*125mm
Voltage (V)	AC85~265V
Explosion proof Grade	Exd II CT6
Anticorrosive Garde	WF 2
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	50W
Color Temperature	2700K-6500K
Installation Height	4-8m
working Height	3-6m
Life Time	50,000(H)
IP Grade	IP 66


Explosion Proof Light

Model : EP-GMD80-H108E

Features:



Model : EP-GMD80-H108E

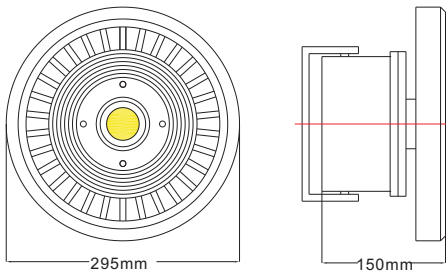

Standard

Standard Size(mm)	295*150mm
Voltage (V)	AC85~265V
Explosion proof Grade	Exd II CT6
Anticorrosive Garde	WF 2
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	80W
Color Temperature	2700K-6500K
Installation Height	4-8m
working Height	3-6m
Life Time	50,000(H)
IP Grade	IP 66

Explosion Proof Light

Model : EP-GMD100-H108E


Features:



Lighting Source



Model : EP-GMD100-H108E

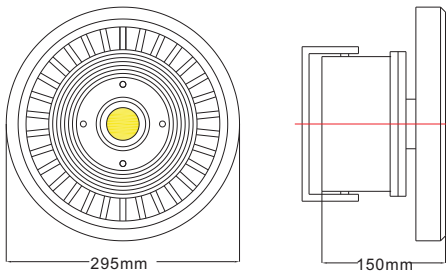


Standard

Standard Size(mm)	300*150mm
Voltage (V)	AC85~265V
Explosion proof Grade	Exd II CT6
Anticorrosive Garde	WF 2
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	100W
Color Temperature	2700K-6500K
Installation Height	4-8m
working Height	3-6m
Life Time	50,000(H)
IP Grade	IP 66


Explosion Proof Light

Model : EP-GMD150-H108E

Features:



Model : EP-GMD150-H108E

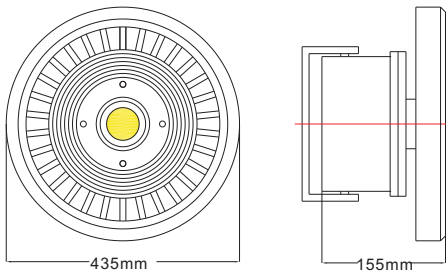

Standard

Standard Size(mm)	435*155mm
Voltage (V)	AC85~265V
Explosion proof Grade	Exd II CT6
Anticorrosive Garde	WF 2
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	150W
Color Temperature	2700K-6500K
Installation Height	4-8m
working Height	3-6m
Life Time	50,000(H)
IP Grade	IP 66


Explosion Proof Light

Model : EP-GMD200-H108E

Features:



Model : EP-GMD200-H108E

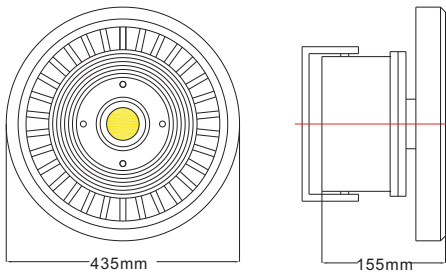

Standard

Standard Size(mm)	435*155mm
Voltage (V)	AC85~265V
Explosion proof Grade	Exd II CT6
Anticorrosive Garde	WF 2
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	200W
Color Temperature	2700K-6500K
Installation Height	4-8m
working Height	3-6m
Life Time	50,000(H)
IP Grade	IP 66