

# LED Circular Light


## Model : ILR-A06-H108A

### Features:

1. Uniform light emission
2. High luminous output (100lm/W)& Low power consumption
3. Color temperature change ( 2700K~ 6500K)
4. SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
5. Easy and firm installation



Model : ILR-A06-H108A



### Standard

Standard Size(mm)	340*90mm
Voltage (V)	AC85~265V
Beam Angle	180 degree
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	6W
Cover Material	Aluminium , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)

# LED Circular Light

## Model : ILR-A16-H108B

### Features:

1. Uniform light emission
2. High luminous output (100lm/W) & Low power consumption
3. Color temperature change ( 2700K~ 6500K)
4. SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
5. Easy and firm installation



Model : ILR-A16-H108B



### Standard

Standard Size(mm)	295*80mm
Voltage (V)	AC85~265V
Beam Angle	180 degree
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	16W
Cover Material	Aluminium , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)

# LED Circular Light

## Model : ILR-A18-N108B

### Features:

1. Uniform light emission
2. High luminous output (100lm/W) & Low power consumption
3. Color temperature change ( 2700K~ 6500K)
4. SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
5. Easy and firm installation



Model : ILR-A18-N108B



### Standard

Standard Size(mm)	350*80mm
Voltage (V)	AC85~265V
Beam Angle	180 degree
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	18W
Cover Material	Aluminium , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)

# LED Circular Light




## Model : ILR-P18-H108A

### Features:

1. Uniform light emission
2. High luminous output (100lm/W)& Low power consumption
3. Color temperature change ( 2700K~ 6500K)
4. SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
5. Easy and firm installation



Model : ILR-P18-H108A

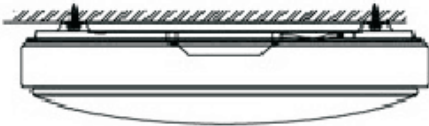

### Standard

Standard Size(mm)	320*105mm
Voltage (V)	AC85~265V
Beam Angle	180 degree
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	18W
Cover Material	Aluminium , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)

# LED Circular Light


## Model : ILR-T08-H108

### Features:

1. Uniform light emission
2. High luminous output (100lm/W)& Low power consumption
3. Color temperature change ( 2700K~ 6500K)
4. SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
5. Easy and firm installation



Model : ILR-T08-H108



### Standard

Standard Size(mm)	300*39mm
Voltage (V)	AC85~265V
Beam Angle	180 degree
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	8W
Cover Material	Aluminium , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)