

# LED PAR Light

**Model : IPAR30-A20-H108E**



**Features:**

**iLIGHTING**  
Green • Professional



Model : IPAR30-A20-H108E

Lighting Source



## Standard

Standard Size(mm)	Ø90*120mm
Voltage (V)	AC85~265V
Beam Angle	60 degree
CRI	>80Ra
Luminous Efficacy	100 lm/w
Power Factor	> 0.90
Power (W)	20W
Cover Material	Aluminium , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)

# LED PAR Light

**Model : IPAR38-A15-N98E**


**Features:**



Lighting Source



Model : IPAR38-A15-N98E

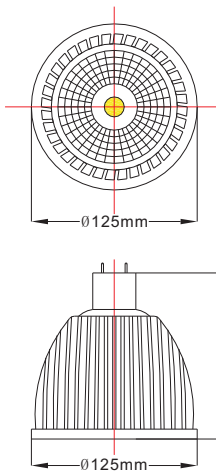

## Standard

Standard Size(mm)	Ø125*121mm
Voltage (V)	AC85~265V
Beam Angle	60 degree
CRI	>80Ra
Luminous Efficacy	90 lm/w
Power Factor	> 0.90
Power (W)	15W
Cover Material	Aluminum , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)

# LED PAR Light

**Model : IPAR38-A15-N108E**


**Features:**



Lighting Source



Model : IPAR38-A15-N108E

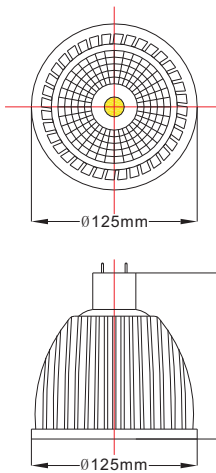

## Standard

Standard Size(mm)	Ø125*121mm
Voltage (V)	AC85~265V
Beam Angle	60 degree
CRI	>80Ra
Luminous Efficacy	100 lm/w
Power Factor	> 0.90
Power (W)	15W
Cover Material	Aluminum , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)
IP Grade	IP 44