

LED Circular Lamp



Model : ILR-A06-H108A

Features:

1. Uniform light emission
2. High luminous output (100lm/W) & Low power consumption
3. Color temperature change (2700K~ 6500K)
4. SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
5. Easy and firm installation



Model : ILR-A06-H108A



Standard

Standard Size(mm)	340*90mm
Voltage (V)	AC85~265V
Beam Angle	180 degree
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	6W
Cover Material	Aluminium , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)

LED Circular Lamp



Model : ILR-A16-H108B

Features:

- 1.Uniform light emission
- 2.High luminous output (100lm/W)& Low power consumption
- 3.Color temperature change (2700K~ 6500K)
- 4.SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
- 5.Easy and firm installation



Model : ILR-A16-H108B



Standard

Standard Size(mm)	295*80mm
Voltage (V)	AC85~265V
Beam Angle	180 degree
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	16W
Cover Material	Aluminium , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)

LED Circular Lamp

Model : ILR-A18-N108B

Features:

1. Uniform light emission
2. High luminous output (100lm/W) & Low power consumption
3. Color temperature change (2700K~ 6500K)
4. SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
5. Easy and firm installation



Model : ILR-A18-N108B



Standard

Standard Size(mm)	350*80mm
Voltage (V)	AC85~265V
Beam Angle	180 degree
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	18W
Cover Material	Aluminium , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)

LED Circular Lamp

Model : ILR-P18-H108A

Features:

1. Uniform light emission
2. High luminous output (100lm/W) & Low power consumption
3. Color temperature change (2700K~ 6500K)
4. SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
5. Easy and firm installation



Model : ILR-P18-H108A



Standard

Standard Size(mm)	320*105mm
Voltage (V)	AC85~265V
Beam Angle	180 degree
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	18W
Cover Material	Aluminium , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)

LED Circular Lamp




Model : ILR-T08-H108

Features:

1. Uniform light emission
2. High luminous output (100lm/W) & Low power consumption
3. Color temperature change (2700K~ 6500K)
4. SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
5. Easy and firm installation



Model : ILR-T08-H108

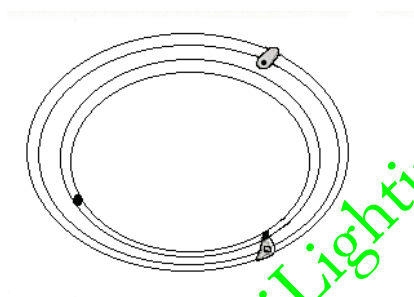

Standard

Standard Size(mm)	300*39mm
Voltage (V)	AC85~265V
Beam Angle	180 degree
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	8W
Cover Material	Aluminium , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)