




Model : ILR-A06-H108A

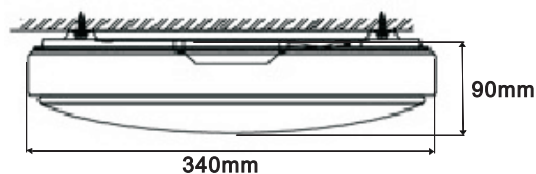


Standard

Standard Size(mm)	340*90mm
Voltage (V)	AC85~265V
Beam Angle	180 degree
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	6W
Cover Material	Aluminium , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)



Model : ILR-A18-H108B

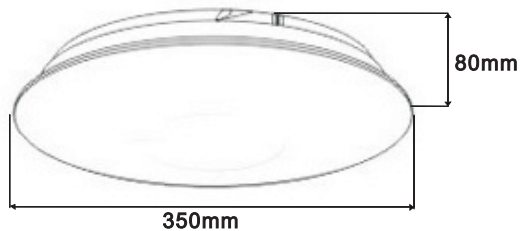


Standard

Standard Size(mm)	350*80mm
Voltage (V)	AC85~265V
Beam Angle	180 degree
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	18W
Cover Material	Aluminium , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)

LED Circular Light



Model : ILR-P18-H108A

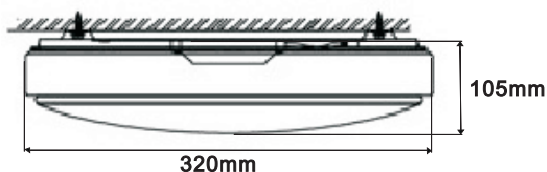


Standard

Standard Size(mm)	320*105mm
Voltage (V)	AC85~265V
Beam Angle	180 degree
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	18W
Cover Material	Aluminium , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)



Model : ILR-T08-H108

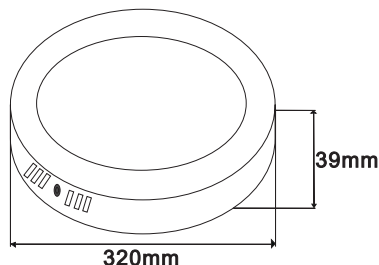

Standard

Standard Size(mm)	300*39mm
Voltage (V)	AC85~265V
Beam Angle	180 degree
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	8W
Cover Material	Aluminium , PC Cover
Color Temperature	2700K-6500K
Life Time	50,000(H)

LED Source Module

Model : LSM-18W-108-155

Model : LSM-10W-108-155

Features:

- 1.Low flicker
- 2.Ease of design-in and flexible for installation with magnet
- 3.High efficacy of up to 100lm/w
- 4.Long life-time:30000 hours
- 5.Applicable to typical downlight with total lumen
1500lm (15W) or 1800lm(18W) or 1000lm(10W)




Lighting Source



Model :LSM-18W-108-155

Model : LSM-10W-108-155

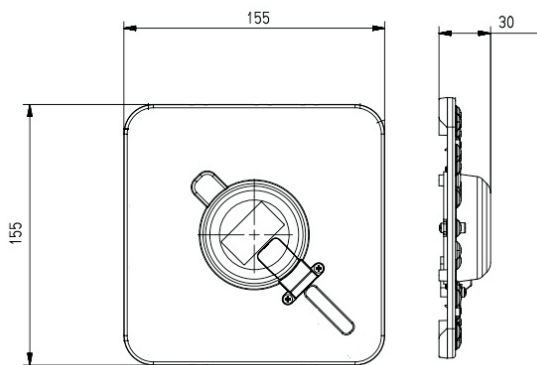

Standard

Standard Size(mm)	155*155*30mm
Voltage (V)	AC85~265V
Beam Angle	180 degree
CRI	>80Ra
Luminous Efficacy	100lm/w
Power Factor	> 0.90
Power (W)	10W/15W/18W
Cover Material	Aluminium
Color Temperature	2700K-6500K
Life Time	30,000(H)