

## Model :CBL-A

### Description




- 1.PC cover : opal, diffuse or transparent
- 2.Frame surface : silver/ white/ black
- 3.Apply : LED strips or PCB 5mm
- 4.Standard lengths:0.5m,1m,1.5m,2m, 2.45m
- 5.SPM Design - power circuit protection to cut off individual LEDs when mal-functioned.
6. Other options : dimmable & color temperature change

### Application:

- \* Kitchen cabinet
- \* Bathroom cabinet
- \* Closet
- \* Show cabinet
- \* Retail shop




Model :CBL-A

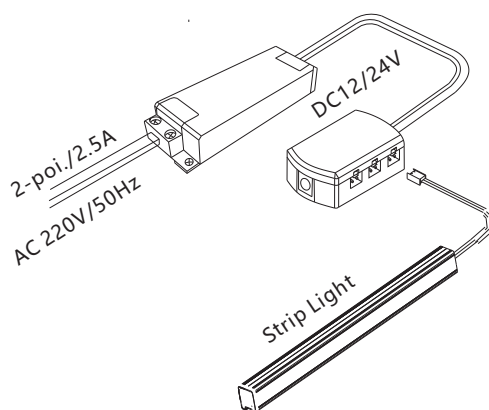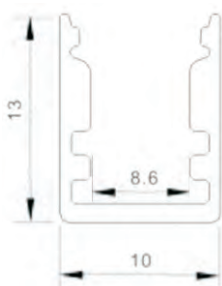


### Standard


Size	10mm(W)*13mm(H)*1000mm(L)
Material	AL6063+PC
Power	9W/M
Voltage(V)	DC12V/24V
Luminous Efficacy	80lm/W
LED Type	Taiwan origin
Color Temp	2700K~6500K
CRI	> 0.93
IP Rating	IP 44
Life Time	50,000(H)
EMC	EN55015:2006+A1:2007+A2:2009 EN61547:2009




Description: male plug



Description: female socket



Description: DC male plug



Description: 6-way distributor

## Model :CBL-A1013-S1000-89F

### Description


- 1.PC cover : opal, diffuse or transparent
- 2.Frame surface : silver/ white/ black
- 3.Apply : LED strips or PCB 5mm
- 4.Standard lengths:0.5m,1m,1.5m,2m, 2.45m
- 5.SPM Design - power circuit protection to cut off individual LEDs when mal-functioned.
6. Other options : dimmable & color temperature change

### Application:

- \* Kitchen cabinet
- \* Bathroom cabinet
- \* Closet
- \* Show cabinet
- \* Retail shop





Model :CBL-A1013-S1000-89F

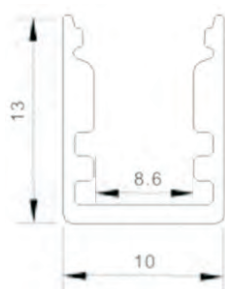


### Standard


Size	10mm(W)*13mm(H)*1000mm(L)
Material	AL6063+PC
Power	9W/M
Voltage(V)	DC12V/24V
Luminous Efficacy	80lm/W
LED Type	Taiwan origin
Color Temp	2700K~6500K
CRI	> 0.93
IP Rating	IP 44
Life Time	50,000(H)
EMC	EN55015:2006+A1:2007+A2:2009 EN61547:2009

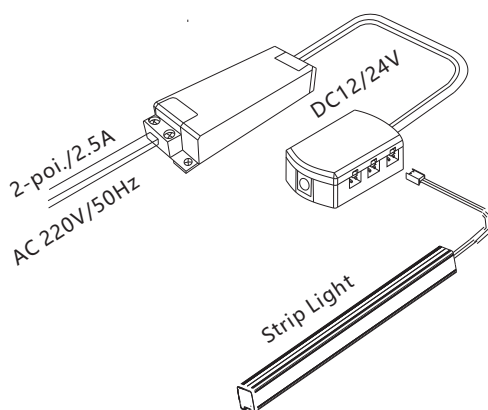


Description: male plug



Description: female socket



Description: DC male plug

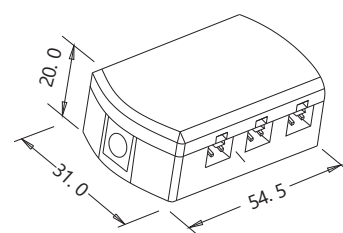

Description: 6-way distributor

## Model :CBL-A0809-S1000-89F


### Description

- 1.PC cover : opal, diffuse or transparent
- 2.Frame surface : silver/ white/ black
- 3.Apply : LED strips or PCB 5mm
- 4.Standard lengths:0.5m,1m,1.5m,2m, 2.45m
- 5.SPM Design - power circuit protection to cut off individual LEDs when mal-functioned.
6. Other options : dimmable & color temperature change

### Application:



- \* Kitchen cabinet
- \* Bathroom cabinet
- \* Closet
- \* Show cabinet

Model : CBL-A0809-S1010-89F

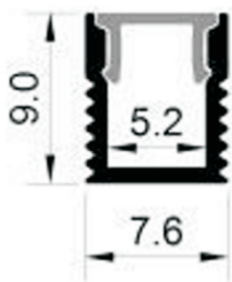


### Standard


Size	7.6mm(W)*9mm(H)*1000mm(L)
Material	AL6063+PC
Power	8W/M
Voltage(V)	DC12V/24V
Luminous Efficacy	80lm/W
LED Type	Taiwan origin
Color Temp	2700K~6500K
CRI	> 0.93
IP Rating	IP 44
Life Time	50,000(H)
EMC	EN55015:2006+A1:2007+A2:2009 EN61547:2009

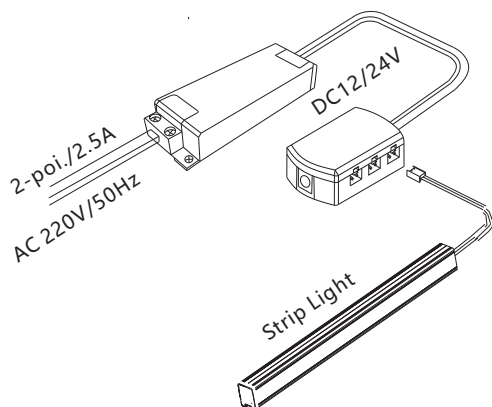


Description: male plug



Description: female socket



Description: DC male plug

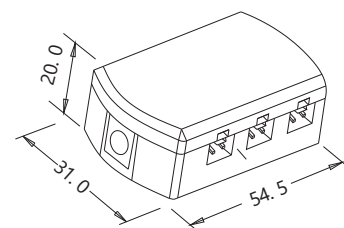

Description: 6-way distributor

# LED Cabinet Light Strip



Lighting Source

## Model :CBL-A1013-S1010-89F

### Description

- 1.PC cover : opal, diffuse or transparent
- 2.Frame surface : silver/ white/ black
- 3.Apply : LED strips or PCB 5mm
- 4.Standard lengths:0.5m,1m,1.5m,2m, 2.45m
- 5.SPM Design - power circuit protection to cut off individual LEDs when mal-functioned.
6. Other options : dimmable & color temperature change

### Application:




- \* Kitchen cabinet
- \* Bathroom cabinet
- \* Closet
- \* Show cabinet

Model : CBL-A1013-S1010-89F




### Standard


Size	10mm(W)*13mm(H)*1000mm(L)
Material	AL6063+PC
Power	10W/M
Voltage(V)	DC12V/24V
Luminous Efficacy	80lm/W
LED Type	Taiwan origin
Color Temp	2700K~6500K
CRI	> 0.90
IP Rating	IP 44
Life Time	50,000(H)
EMC	EN55015:2006+A1:2007+A2:2009 EN61547:2009

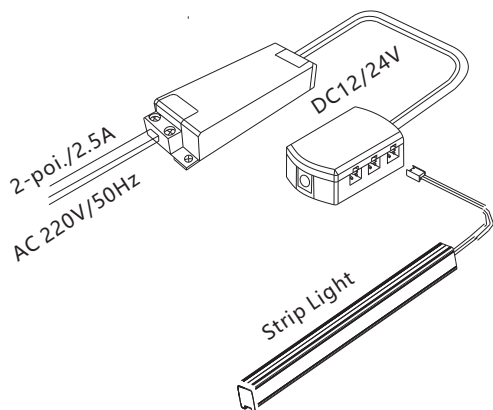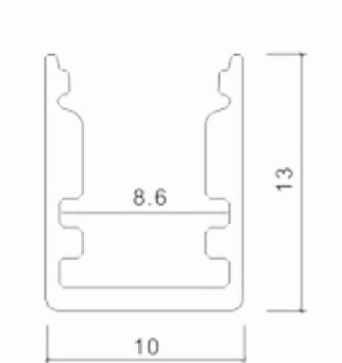


Description: male plug



Description: female socket



Description: DC male plug

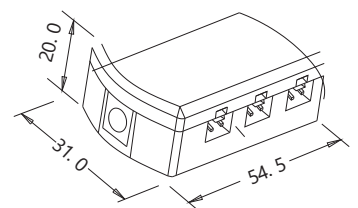

Description: 6-way distributor

# LED Cabinet Light Strip



Lighting Source

## Model :CBL-A1510-S1010-89F

### Description

- 1.PC cover : opal, diffuse or transparent
- 2.Frame surface : silver/ white/ black
- 3.Apply : LED strips or PCB 5mm
- 4.Standard lengths:0.5m,1m,1.5m,2m, 2.45m
- 5.SPM Design - power circuit protection to cut off individual LEDs when mal-functioned.
6. Other options : dimmable & color temperature change

### Application:



- \* Kitchen cabinet
- \* Bathroom cabinet
- \* Closet
- \* Show cabinet




Model : CBL-A1510-S1010-89F

### Standard


Size	15mm(W)*10mm(H)*1000mm(L)
Material	AL6063+PC
Power	10W/M
Voltage(V)	DC12V/24V
Luminous Efficacy	80lm/W
LED Type	Taiwan origin
Color Temp	2700K~6500K
CRI	> 0.93
IP Rating	IP 44
Life Time	50,000(H)
EMC	EN55015:2006+A1:2007+A2:2009 EN61547:2009

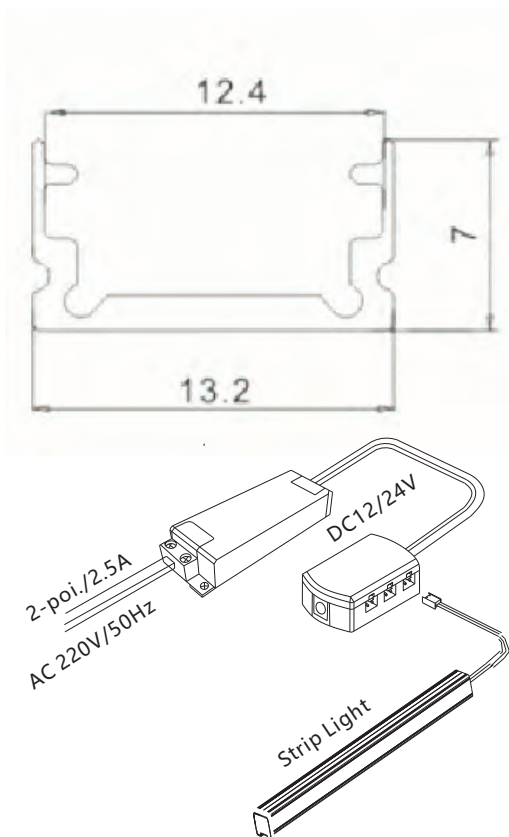


Description: male plug



Description: female socket



Description: DC male plug

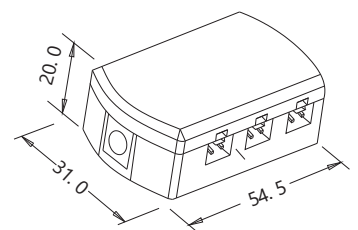

Description: 6-way distributor

# LED Cabinet Light Strip



Lighting Source

## Model :CBL-A1713-S1010-89F


### Description

- 1.PC cover : opal, diffuse or transparent
- 2.Frame surface : silver/ white/ black
- 3.Apply : LED strips or PCB 5mm
- 4.Standard lengths:0.5m,1m,1.5m,2m, 2.45m
- 5.SPM Design - power circuit protection to cut off individual LEDs when mal-functioned.
6. Other options : dimmable & color temperature change

### Application:



- \* Kitchen cabinet
- \* Bathroom cabinet
- \* Closet
- \* Show cabinet

Model : CBL-A1713-S1010-89F

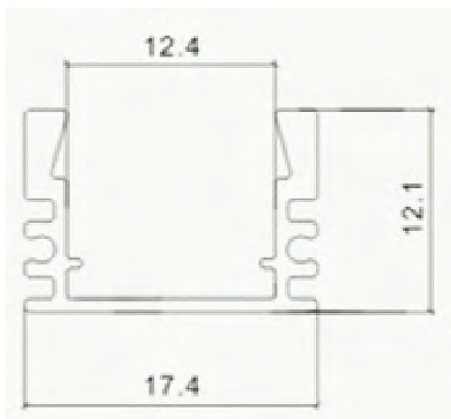


### Standard


Size	17mm(W)*13mm(H)*1000mm(L)
Material	AL6063+PC
Power	10W/M
Voltage(V)	DC12V/24V
Luminous Efficacy	100lm/W
LED Type	Taiwan origin
Color Temp	2700K~6500K
CRI	> 0.90
IP Rating	IP 44
Life Time	50,000(H)
EMC	EN55015:2006+A1:2007+A2:2009 EN61547:2009

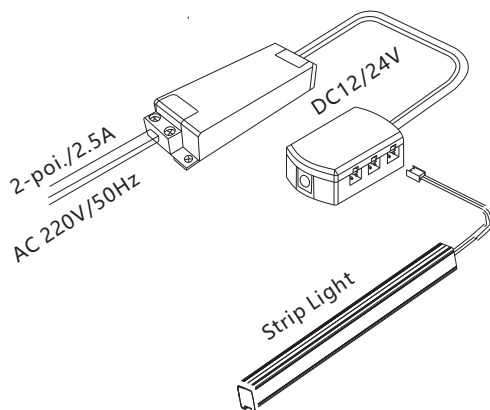


Description: male plug



Description: female socket



Description: DC male plug

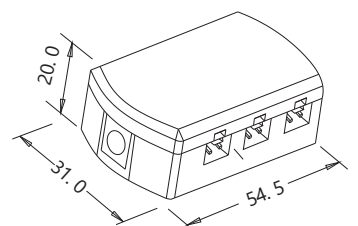

Description: 6-way distributor



# LED Cabinet Light Strip

## Model : CBL-P1418

### Features:

- \* Slim size 14mm(W)x18.5mm(H)
- \* Exceptional even illumination ( LED spot not seen)
- \* 180 degree ( 3 - sectional) lighting output
- \* Ideal for both direct or indirect light effect
- \* To maximize heat dissipation
- \* Installation in serial for seamless lighting output
- \* SPM Design - power circuit protection to cut off individual LEDs when mal-functioned.
- \* CRI > 93
- \* High lumen output 100lm/w
- \* Other options : dimmable & color temperature change

### Application:



- \* Kitchen cabinet
- \* Bathroom cabinet
- \* Closet
- \* Show cabinet
- \* Retail chop
- \* & many other applications as appropriate



Lighting Source




Model:CBL-P1418

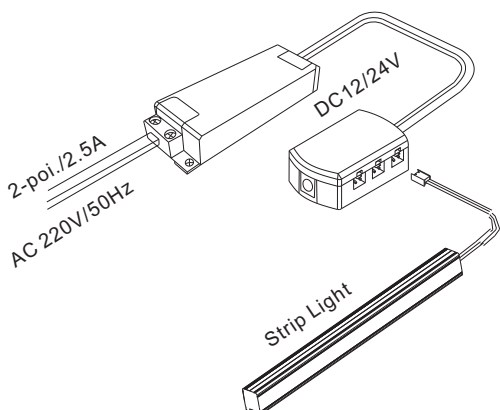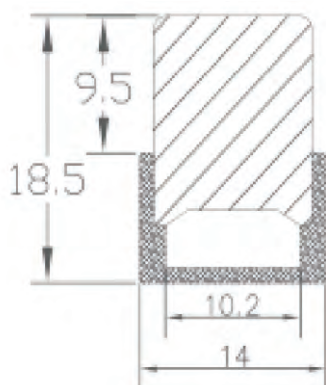


### Standard


Standard Dim(mm)	14mm(W)*18.5mm(H) *1000mm(L) (Length will be varied to suit cabinet size)
Material	PMMA
Cover	Milky
Power(W)	12W / M
Voltage(V)	DC12V/24V
Luminous Output	100 lm/W
Luminous Flux	1200lm/M
Beam Angle	180° degree
LED Type	2216 Taiwan Top Grade
Color Temp	2700K/3000K/4000K/5000K
CRI	≥93
IP Grade	IP44
Life Span	50000 hours




male plug



female socket



DC male plug

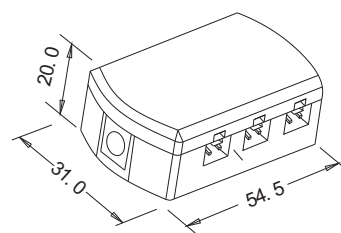

6-way distributor

# LED Cabinet Light Strip

## Model : CBL-A0908

### Features:

- \* Slim size 9.92mm(W)x8.35mm(H)
- \* Exceptional even illumination ( LED spot not seen)
- \* 120 degree lighting output
- \* Ideal for both direct or indirect light effect
- \* Aluminum to maximize heat dissipation
- \* Installation in serial for seamless lighting output
- \* SPM Design - power circuit protection to cut off individual LEDs when mal-functioned.
- \* CRI > 93
- \* High lumen output 100lm/w
- \* Other options : dimmable & color temperature change

### Application:

- \* Kitchen cabinet
- \* Bathroom cabinet
- \* Closet
- \* Show cabinet
- \* Retail chop
- \* & many other applications as appropriate






Lighting Source




Model:CBL-A0908

### Standard


Standard Dim(mm)	9.92mm(W)*8.35mm(H) *1000mm(L) (Length will be varied to suit cabinet size)
Material	A6063+PC
Cover	Milky
Power(W)	8W / M
Voltage(V)	DC12V/24V
Luminous Output	100 lm/W
Luminous Flux	800lm/M
Beam Angle	120° degree
LED Type	2216 Taiwan Top Grade
Color Temp	2700K/3000K/4000K/5000K
CRI	≥93
IP Grade	IP44
Life Span	50000 hours

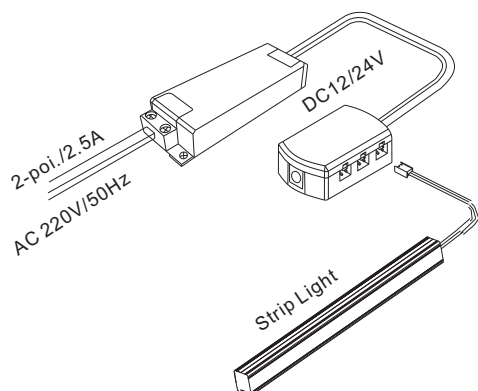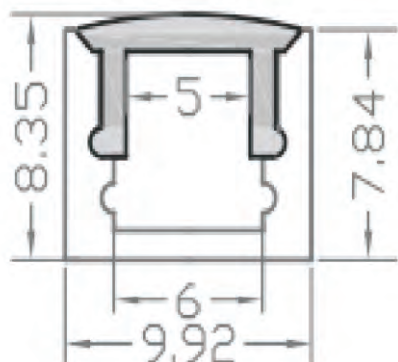


male plug



female socket



DC male plug

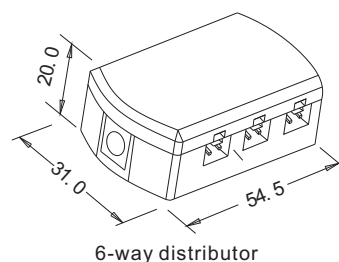

6-way distributor



# LED Cabinet Light Strip with magnet



Lighting Source

## Model :CBL-A1110

### Features:

- \* Slim size 10.8mm(W)x10mm(H)
- \* Exceptional even illumination ( LED spot not seen)
- \* 120 degree lighting output
- \* Ideal for both direct or indirect light effect
- \* With magnet for ease of installation
- \* Installation in serial for seamless lighting output
- \* SPM Design - power circuit protection to cut off individual LEDs when mal-fuctioned.
- \* CRI > 90
- \* High lumen output 100lm/w
- \* Other options : dimmable & color temperature change






Model:CBL-A1110

### Application:


- \* Kitchen cabinet
- \* Bathroom cabinet
- \* Closet
- \* Show cabinet
- \* Retail chop
- \* & many other applications as appropriate

### Standard


Standard Dim(mm)	10.8mm(W)*10mm(H) *560mm(L) (Length will be varied to suit cabinet size)
Material	Aluminum, PC Cover
Cover	Milky
Power(W)	8W / M
Voltage(V)	DC12V/24V
Luminous Output	100 lm/W
Luminous Flux	800lm/M
Beam Angle	120° degree
LED Type	2216 Taiwan Top Grade
Color Temp	2700K/3000K/4000K/5000K
CRI	≥90
IP Grade	IP54
Installation	Magnet
Life Span	50000 hours

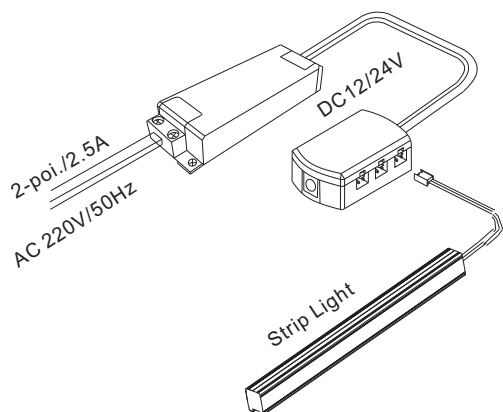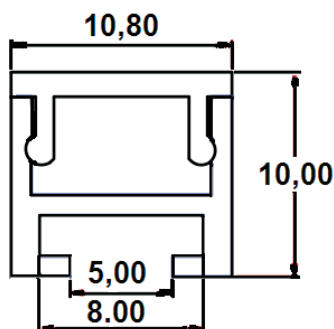


male plug



female socket



DC male plug

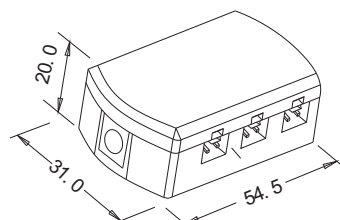

6-way distributor

# LED Cabinet Light Strip

**Model :CBL-A0811**

## Features:

- \* Slim size 11.4mm(W)x8.91mm(H)
- \* Exceptional even illumination ( LED spot not seen)
- \* Ideal for both direct or indirect light effect
- \* Aluminum to maximize heat dissipation
- \* Installation in serial for seamless lighting output
- \* SPM Design - power circuit protection to cut off individual LEDs when mal-functined.
- \* CRI > 90
- \* High lumen output 100lm/w
- \* Other options : dimmable & color temperature change

## Application:

- \* Kitchen cabinet
- \* Bathroom cabinet
- \* Closet
- \* Show cabinet
- \* Retail chop
- \* & many other applications as appropriate

**ilighting**<sup>®</sup>  
Green • Professional






Model:CBL-A0811


Lighting Source

## Standard


Standard Dim(mm)	8.91mm(W)*11.4mm(H) *1000mm(L) (Length will be varied to suit cabinet size)
Material	Aluminum, PC cover
Cover	Milky
Power(W)	8W / M
Voltage(V)	DC12V/24V
Luminous Output	100 lm/W
Luminous Flux	800lm/M
Beam Angle	120° degree
LED Type	2216 Taiwan Top Grade
Color Temp	2700K/3000K/4000K/5000K
CRI	≥90
IP Grade	IP54
Life Span	50000 hours

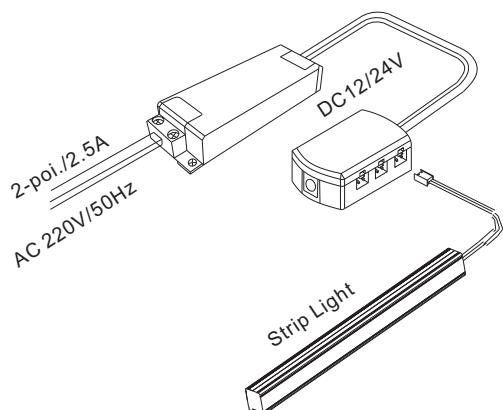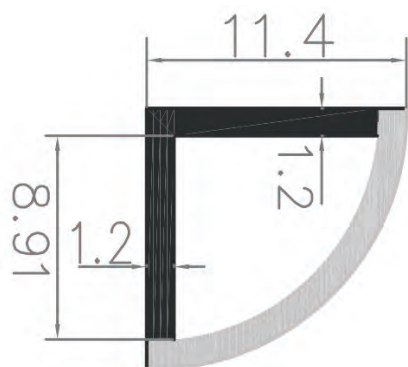


male plug



female socket



DC male plug

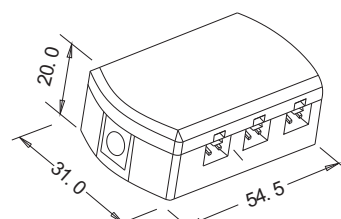

6-way distributor

# LED Cabinet Light Strip

**Model :CBL-A1713**

## Features:

- \* Slim size 17mm(W)x13mm(H)
- \* Exceptional even illumination ( LED spot not seen)
- \* For both direct or indirect light effect
- \* Aluminum to maximize heat dissipation
- \* Installation in serial for seamless lighting output
- \* SPM Design - power circuit protection to cut off individual LEDs when mal-fucntioned.
- \* CRI > 90
- \* High lumen output 100lm/w
- \* Other options : dimmable & color temperature change

## Application:



- \* Kitchen cabinet
- \* Bathroom cabinet
- \* Closet
- \* Show cabinet
- \* Retail chop
- \* & many other applications as appropriate

**iLIGHTING**  
Green • Professional




Model:CBL-A1713

Lighting Source

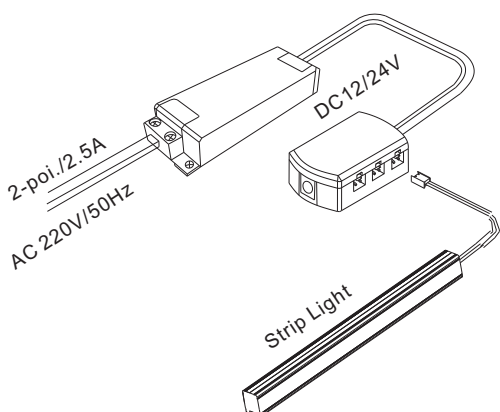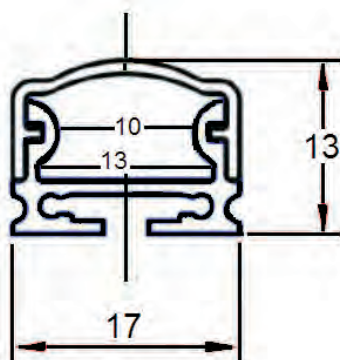


## Standard


Standard Dim(mm)	17mm(W)*13mm(H) *1000mm(L) (Length will be varied to suit cabinet size)
Material	Aluminum, PC cover
Cover	Milky
Power(W)	8W / M
Voltage(V)	DC12V/24V
Luminous Output	100 lm/W
Luminous Flux	800lm/M
Beam Angle	120° degree
LED Type	2216 Taiwan Top Grade
Color Temp	2700K/3000K/4000K/5000K
CRI	≥90
IP Grade	IP54
Life Span	50000 hours




male plug



female socket



DC male plug



6-way distributor

# LED Cabinet Light Strip

**Model :CBL-A2008**

## Features:

- \* Slim size 19.8mm(W)x7.95mm(H)
- \* Exceptional even illumination ( LED spot not seen)
- \* 120 degree lighting output
- \* Ideal for both direct or indirect light effect
- \* Aluminum to maximize heat dissipation
- \* Installation in serial for seamless lighting output
- \* SPM Design - power circuit protection to cut off individual LEDs when mal-fuctioned.
- \* CRI > 90
- \* High lumen output 100lm/w
- \* Other options : dimmable & color temperature change



## Application:

- \* Kitchen cabinet
- \* Bathroom cabinet
- \* Closet
- \* Show cabinet
- \* Retail chop
- \* & many other applications as appropriate







Model:CBL-A2008

Lighting Source

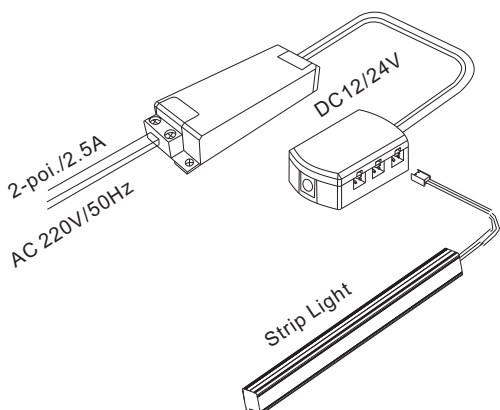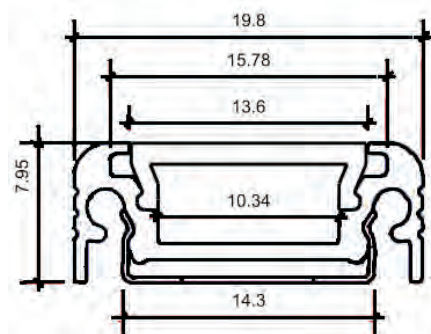

## Standard

Standard Dim(mm)	19.8mm(W)*7.95mm(H) *1000mm(L) (Length will be varied to suit cabinet size)
Material	Aluminum, PC Cover
Cover	Milky
Power(W)	8W / M
Voltage(V)	DC12V/24V
Luminous Output	100 lm/W
Luminous Flux	800lm/M
Beam Angle	120° degree
LED Type	2216 Taiwan Top Grade
Color Temp	2700K/3000K/4000K/5000K
CRI	≥90
IP Grade	IP54
Life Span	50000 hours

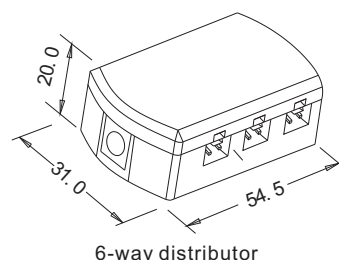

# LED Cabinet Light Strip

**Model :CBL-A2121**

## Features:

- \* Slim size 20mm(W)x21mm(H)
- \* Exceptional even illumination ( LED spot not seen)
- \* 270 degree ( 3 - sectional) lighting output
- \* Ideal for both direct or indirect light effect
- \* To maximize heat dissipation
- \* Installation in serial for seamless lighting output
- \* SPM Design - power circuit protection to cut off individual LEDs when mal-fuctioned.
- \* CRI > 90
- \* High lumen output 100lm/w
- \* Other options : dimmable & color temperature change

## Application:



- \* Kitchen cabinet
- \* Bathroom cabinet
- \* Closet
- \* Show cabinet
- \* Retail chop
- \* & many other applications as appropriate

**ilighting**<sup>®</sup>  
Green • Professional




Model:CBL-A2121

Lighting Source

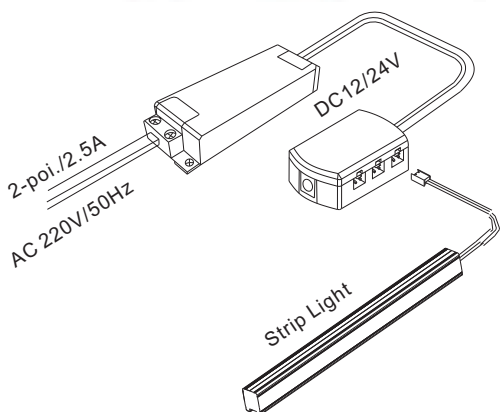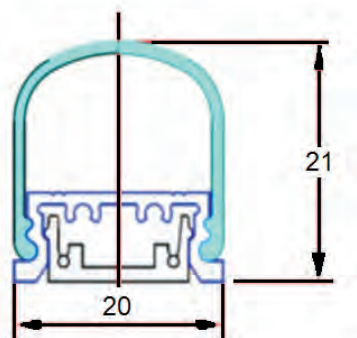


## Standard


Standard Dim(mm)	20mm(W)*21mm(H) *1000mm(L) (Length will be varied to suit cabinet size)
Material	Aluminum, PC Cover
Cover	Milky
Power(W)	8W / M
Voltage(V)	DC12V/24V
Luminous Output	100 lm/W
Luminous Flux	800lm/M
Beam Angle	270° degree
LED Type	2216 Taiwan Top Grade
Color Temp	2700K/3000K/4000K/5000K
CRI	≥90
IP Grade	IP54
Life Span	50000 hours




male plug



female socket



DC male plug

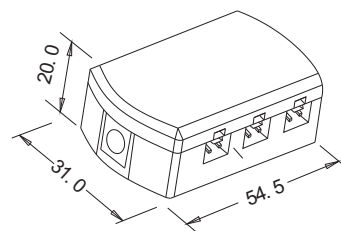

6-way distributor