

CATALOG

LED Lighting Series

iLighting Global Enterprise Co., Ltd.

LED
TUBE

iLighting Global Enterprise Co., Ltd.

Office Address: Room B3, 18/F Bonsun Industrial Building,
364-366 Sha Tsui Road, Tsuen Wan, HongKong

Phone: 852-39745593

Fax: 852-35440462

Email: info@ilighting.com.hk

Website: www.ilighting.com.hk



www.ilighting.com.hk
Catalog Series: NO.21

LED TUBE

LED Lighting Series



LED
Lighting
Series


CONTENTS

Company Profile 公司簡介	1-2
Lighting Basic Concept 照明基本概念	3-8
General Lighting 一般應用照明	9-19
Sensor Lighting 傳感器應用照明	20-28
Preset & Timer Lighting 預設和計時應用照明	29-33
Dimming Lighting 調光應用照明	34-38
Wireless Lighting 無線應用照明	39-43
Special Purpose Lighting 特殊用途照明	44-51
LED Driver LED 驅動器	52-56
PL Tube Series 橫插燈系列	57-60

A General Lighting 一般應用照明



B Sensor Lighting 傳感器應用照明

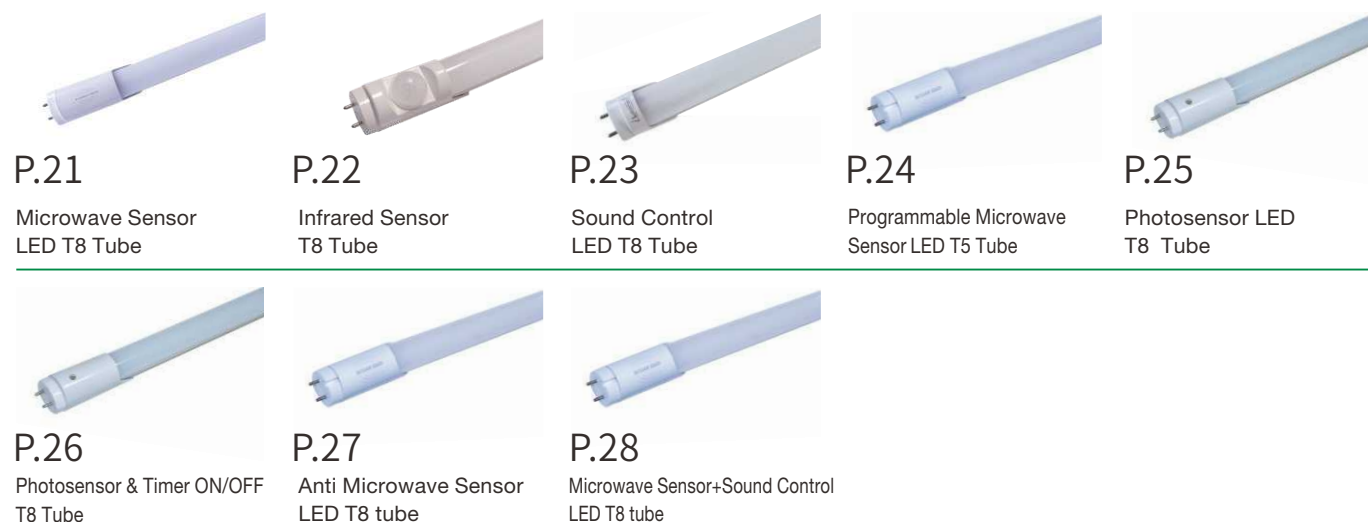

C Preset & Timer Lighting 預設和計時應用照明



D Dimming Lighting 調光應用照明



E Wireless Lighting 無線應用照明



F Special Purpose Lighting 特殊用途照明



G LED Driver LED驅動器



Company Profile

公司簡介

ABOUT US 關於我們

iLIGHTING Global Enterprise Co. Ltd. emerges as a professional and high-end lighting designer, manufacturer and supplier established in Hong Kong and Mainland China under the Brand name 'iLighting' since 2007. The company is also a strategic OEM/ODM partner of many organization-wide lighting brands. The company devotes herself in the development, manufacturing and marketing of green, low-carbon and energy-saving lighting products. With continuous investment on R&D, we are proud to provide a wide range of LED products and work with worldwide partners in developing and managing Energy Management System (EMS) through the application of Power line and WiFi technology.

iLIGHTING智能環球企業有限公司成立於2007年是一家集高端照明設計、製造和供應為一體的專業照明公司，自2007年起在香港和中國大陸以“iLighting”的名字成立。公司也是許多全組織照明品牌的戰略性OEM/ODM合作夥伴。公司致力於綠色、低碳、節能照明產品的開發、製造和銷售。憑藉對研發的持續投資，我們自豪地提供範圍廣泛的LED產品，並通過應用Power line和WiFi科技與全球合作夥伴合作開發和管理能源管理系統(EMS)。

Product Capacity 生產能力

- LED lighting with integrated design and built-in advanced electronic driver for building lighting retrofit.
- LED indoor and outdoor lighting with internal and external drivers.
- LED lighting emergency fitting and charging packs.
- Extra long life LED lamps for high power high bay and flood lights.
- Total system solution for dimming lighting control deploying WiFi, DAL, Lonwork, Bluetooth 4.0, Zigbee technologies.
- OEM / ODM energy saving lighting as required by clients for new and retrofit installation.
- Total Energy Management Solution for Intelligent Building Management.
- LED照明與集成設計和內置先進的電子驅動器，用於建築照明改造。
- 室內和室外LED照明，有內部和外部驅動器。
- LED照明應急配件和充電器。
- 超長壽命LED燈，適用於大功率高位燈和泛光燈。
- 全系統調光照明控制解決方案，採用WiFi、DALI、Lonwork, Bluetooth 4.0, Zigbee 通信技術。
- OEM/ODM節能照明，可根據客戶的要求進行更新改造。
- 智能建築管理的全能量管理解決方案。

OUR MISSION 我們的使命

We look to serve our client with the best quality of products and viable solutions of energy management system through intelligent system integration. Product adaptability is our strength ; continuous improvement is our norm of work and meeting customer satisfaction is our goal.

我們希望通過智能系統集成，為客戶提供最優質的產品和可行的能源管理系統解決方案。產品適應性是我們的優勢，持續改進是我們的工作準則，滿足客戶滿意是我們的目標。

OUR ADVANTAGES 我們的優勢

- Excellent after-sale services.
- OEM and ODM for global lighting companies.
- Flexible design and tailor-made products to suit retrofit projects.
- 優良的售後服務。
- 為全球照明公司提供OEM和ODM。
- 靈活的設計和定制的產品，以適應更新改造項目。

Office Address:

Room B3, 18/F Bonsun Industrial Building, 364-366 Sha Tsui Road, Tsuen Wan, HongKong

Phone: 852-39745593


Fax: 852-35440462

E-mail: info@ilighting.com.hk

Website: www.ilighting.com.hk

Lighting Basic Concept


照明基本概念

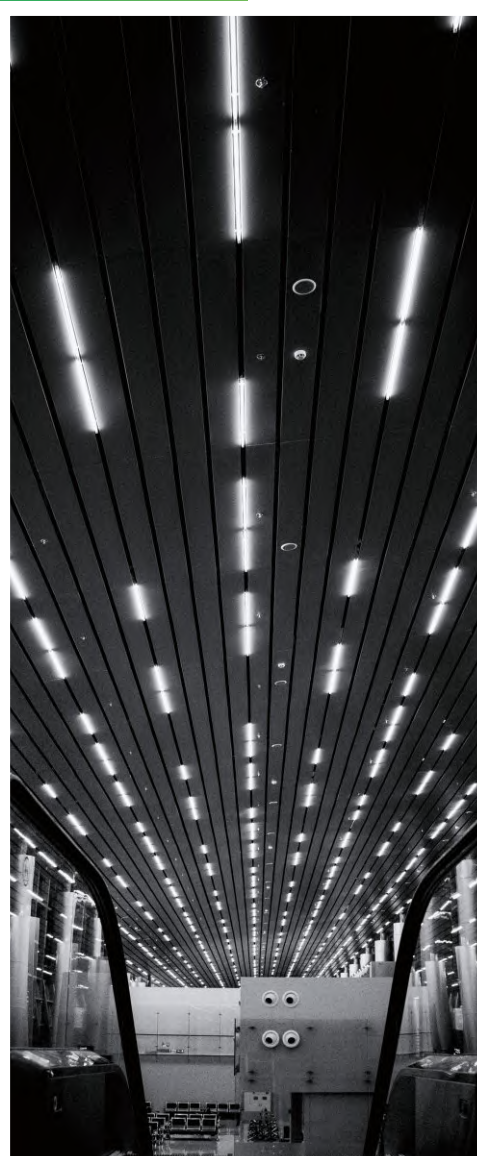

Lumen 流明

Lumen 實際上是代表著光的強度，也就是光通量(Luminous flux)即指光源在某單位時間內所發出之光線總數量。一般稱作光束)的單位，簡而言之，流明就是光束照在物體表面的量。


Lumen actually represents the intensity of lights. that is, the luminous flux(Luminous Flux) refers to the unit of the total amount of light emitted by alight source in a unit time, generally referred to as the light beam. In short, lumens is the light beam Amount on the surface of the object.

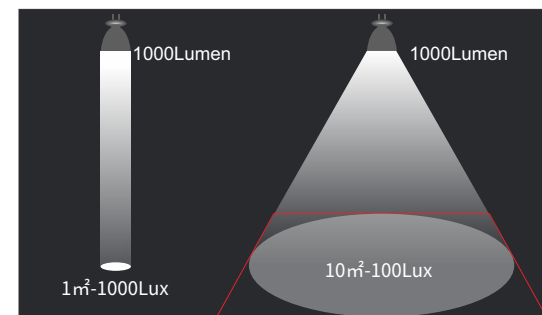

Color Rendering 顯色度

顯色度以Ra來表示，天然光的顯色度為100 Ra，顯色度越接近100Ra，我們看到的顏色就越接近物體的自然原色。也就是顏色逼真的程度，顯色度高 我們所看到的顏色也就是較接近自然原色，顯色度低對於顏色的表現較差，所看到的顏色偏差也延遲。

Color rendering is represented by Ra, the color rendering of natural light is 100 Ra, the closer the color rendering is to 100 Ra, the color we see is closer to the natural primary color of the object. Color is realistic. The degree of color rendering is high. The color we see is close to natural primary color, low color rendering, poor performance for color, The color deviation seen is also delayed.

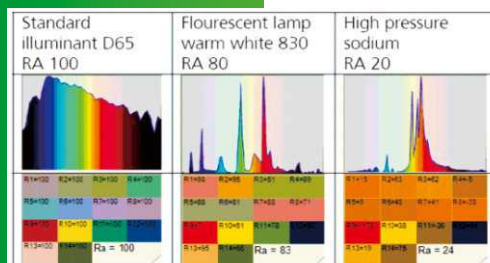

Color Temperature 色溫

色溫及不同色溫應用什麼環境——以絕對溫度 K(kelvin)來表示，色溫度 3000k以下時，光色有偏紅的現象(黃光)，給予一種溫暖、親切、舒適的感覺；色溫度超過 5000k時，顏色則偏向藍光(白光)，給人一種清冷的感覺，令環境變得清冷和寧靜。

通常亞熱帶人較喜歡清冷 4000k以上，而寒帶的人較喜歡 4000k以下的色溫度。

Color temperature and what environment is used for different color temperatures-expressed in absolute temperature K (kelvin), when the color temperature is below 3000k, the light color has a reddish phenomenon (yellow light), giving a warm, friendly, comfortable feeling; color temperature exceeds 5000k At this time, the color is biased towards blue light (white light), giving a cool feeling. Make the environment clear and peaceful.

Generally, people in the subtropics prefer cold temperatures above 4000k, while those in the cold regions prefer colors below 4000k.

WB SETTINGS	COLOR TEMPETATURE	LIGHT SOURCES
	10000-15000K	Clear Blue Sky
	6500-8000K	Cloudy Sky / Shade
	6000-7000K	Noon Sunlight
	5500-6500K	Average Daylight
	5000-5500K	Electronic Flash
	4000-5000K	Fluorescent Light
	3000-4000K	Early AM/ Late PM
	2500-3000K	Domestic Lighting
	1000-2000K	Candle Flame



Color Rendering 壽命

分為平均壽命和經濟壽命兩種，以小時為單位。

平均壽命 (rate average life)

例如，每個100個燈泡同時亮著，若6000小時後，第50個燈泡壞掉熄滅，此燈泡的平均壽命則為6000小時。

經濟壽命 (economic life)

指流明輸出的總時數

以上，燈的光通維持率達到標準規定的要求並能繼續燃點至50%的燈(即50%的燈失效時的壽命)，同時考慮損壞以及光束輸出衰減的狀況下能維持光源為70%以上。

Divided into two types of average life and economic life, in hours.


Life expectancy (rate average life)

For example, each of the 100 light bulbs is on at the same time. If after 60,000 hours, The 50th lamp is broken and extinguished, and the average life of the lamp is 6000 hours.

Economic life

Economic life refers to lumen output.

The above, The lumen maintenance rate of the indicator lamp meets the requirements of the standard that can continue burning point to 50% of lamps (ie, that point at 50% of lamp fails). Taking into account for the damage, lumen output decay, it can maintain light source at 70% healthy condition.

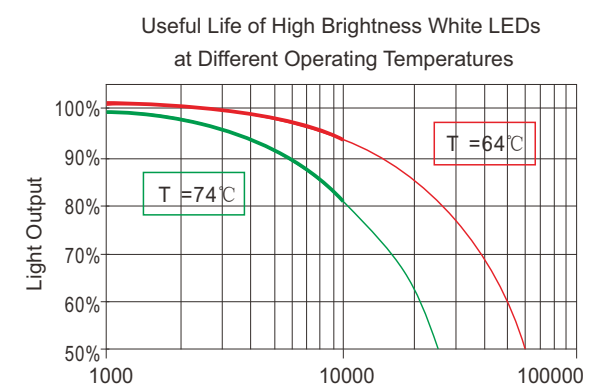

Fire Proof Material 物料防火等

級塑料阻燃等級由 HB, V-2, V-1向V-0逐級遞增。

HB：UL94標準中最低的阻燃等級，要求對於3到13毫米厚的樣品，燃燒速度小於 40毫米每分鐘；小於 3毫米厚的樣品，燃燒速度小於 70毫米每分鐘；或者在 100毫米的標誌前熄滅。

- V-2: 對樣品進行兩次 10秒的燃燒測試後, 火焰在 30秒內熄滅, 可以引燃 30cm下方的藥棉。
- V-1: 對樣品進行兩次 10秒的燃燒測試後, 火焰在 30秒內熄滅, 不能引燃 30cm下方的藥棉。
- V-0: 對樣品進行兩次 10秒的燃燒測試後, 火焰在 10秒內熄滅, 不能有燃燒物掉下。

Plastic flame retardant grades are gradually increased from HB, V-2, V-1 to V-0.

HB: The lowest flame retardant grade in the UL94 standard, Require for 3 to 13mm thick samples with a burning rate of less than 40 mm per minute; less than 3 mm thick samples with a burning rate of less than 70 mm per minute; or stop at 100 mm sign.

V-2: After two 10-second burn tests on the sample, the


flame stops at 30 seconds, would ignite cotton wool below 30cm.

V-1: After two 10-second fire tests on the sample, the flame was at 30 seconds Inside goes out. Would not ignite cotton wool below 30cm.


V-0: After two 10-second burn tests on the sample, the flame stops at 10 seconds. No burning substances should fall off.



Wiring Diagram 接線方案

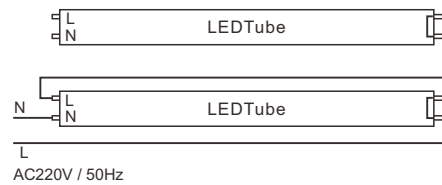

- 新支架內之接線圖

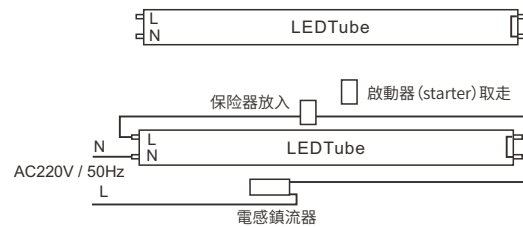

- 新支架內之接線圖
- 把T8螢光直管及啟動器 (starter) 取走, 更換單獨端 T8LED直管電感鎮流器, 之後放入保險器, 不需要任何線路上改動。



Stroboscopic Suppression 頻閃抑制

理想的光源亮度是鎮流後之直流電壓恆定不變的, 這就是理論上的絕對無頻閃。實際上我們平常使用的燈具直流電壓都不會真正的恆定不變, 週期的亮度高低變化程度就是頻率。

市面常見LED驅動電路, 頻閃深度最大的頻率一般都是 100HZ左右。因為PWM高頻是調製在50HZ整流後的電壓

Ideal light source brightness is constant, which is absolute no stroboscopic depth. In fact, the brightness of the lamps we usually install will not be truly stable. The degree of change in the brightness within the period is the frequency.

The common LED drive circuit in the market has the stroboscopic depth at frequency 100 HZ or so. This is because PWM high frequency is modulated on the voltage after 50 HZ rectification. In actual lamps, there will be a certain stroboscopic depth at any frequency. (The difference between the greatest brightest and smallest brightness). Well, there would be the strobe frequency corresponding to the maximum stroboscopic depth, that has the biggest strobe depth value.

The higher the strobe frequency, the smaller the impact is on peoples. As a consulsion, the lower the stroboscopic depth can reduce or eliminate low-frequency light vision fatigue that reduces the burden on the eyes and cares about eye health.

上。實際燈具中, 任何的頻率上都會有一定的頻閃深度 (最亮的亮度和最暗的亮度之差)。那麼, 這裡就存在一個頻閃深度最大的時候所對應的頻閃頻率。還有就是最大的頻閃深度值。頻閃頻率越高對人的影響越小, 頻閃深度越小對人的影響越小, 總體來說頻閃深度越小對人降低或消除導致視力疲勞的低頻率光, 減輕眼睛負擔, 關愛眼睛。




Glare 眩光

是指視野中由於不適宜亮度分佈, 是因視野內的亮度大幅超過眼睛所適應, 以致引起視覺不舒適和降低物體可見度的視覺條件。視野內產生人眼無法適應之光亮感覺, 可能引起厭惡、煩擾、不舒服或視力受損不舒服、甚或喪失明視度。在視野中某一局部地方出現過高的亮度或前後發生過大的亮度變化。

眩光是引起視覺疲勞的重要原因之一。

Refers to the unsuitable brightness distribution in the visual field, resulting in visual discomfort and reduced object visibility Visual conditions. There is a discomfort feeling in the eye vision that a person cannot withstand that would cause disgust, discomfort or even loss of vision. Excessive brightness in a special location of vision, or excessive brightness changes.

Glare is one of the important causes of visual fatigue.

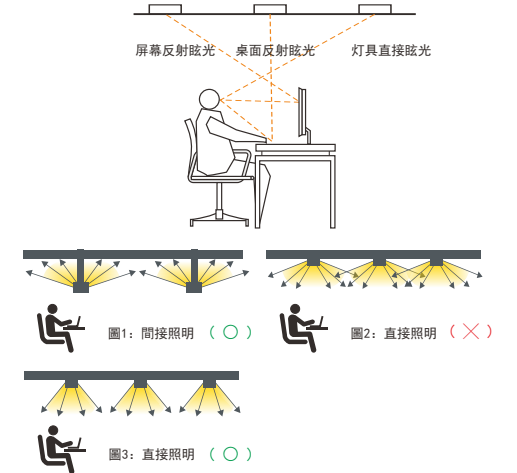

Power Factor 功率因數

日常使用的交流電壓是電壓高低不斷地在變化的, 理想情況下, 電壓和電流相位完全同相, $Pf=1$ 。同步下最大的發揮電線的傳輸效率。這情況下用電設備所使用的所有功率叫稱功率。

電器的最大電流瞬間比電網最高電壓的瞬間提前或滯後, 那就降低電線的效率。由於其不同步, 電線內阻造成額外的功率損耗, 這部分損耗的功率稱無功率。

The AC voltage used in daily life is constantly changing in voltage, ideally In the following, voltage and current are called in-phase, and $PF=1$. Can make the most of the wire Transmission efficiency. In this case, all the power used by the electrical equipment is called active power.

The maximum current of the appliance is instantaneously earlier or later than the instant of the maximum voltage of the power grid. Will reduce the efficiency of the wire. Due to its non-synchronization, the internal resistance of the wire causes additional Power loss, the power lost in this part is called no power. Therefore, we generally

Minium Allowable Power Factor For Non-Directional LED Lamp With Integrated Driver

Rated Lamp Wattage(LW)	minimum allowable power factor
$LW \leq 5W$	0.5
$5W < LW \leq 25W$	0.7
$LW > 25W$	0.9

Minium Allowable Power Factor For Directional LED Lamp With Integrated Driver

Rated Lamp Wattage(LW)	minimum allowable power factor
$LW \leq 5W$	0.5
$5W < LW \leq 25W$	0.7
$LW > 25W$	0.9

information refer to Hong Kong Voluntary Energy Efficiency Labelling for LED lamp- January 2017 EMSD (Electrical and Mechanical Services Department)

want to make the electrical equipment as much as possible The highest voltage is synchronized. The closer the PF is to 1, the more synchronized the wire loss is the more environmentally friendly.



Light source efficiency lm/w (lumen efficiency)


光源效率 lm/w (流明效率)

光源的效率取決於其所發出的光的流明除以起耗電量所得值LED光亮度, 並非以功耗(W)度量, 而是以流明輸出(lm)來決定。

iLighting LED 流明效益高, 更有歐洲A+級能源標籤, 保證節電環保。

The efficiency of a light source depends on the lumen of the light it emits divided by the power consumption LED brightness is not similar to wattage (W) measurement, but measured in lumens output (lm) Decide.

iLighting LED Lumen has high lumen efficiency, and it also has obtained European A+ energy label to ensure power saving and environmental protection.

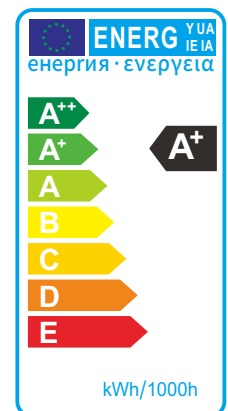



LED International standard for chromaticity difference


LED 光源色度差異之國際標準

Chromaticity Tolerances

Quadrangles

- In both ΔCCT and Duv directions
- Approximately equal to 7-step MacAdam ellipses

Nominal CCT	Target CCT and tolerance(K)	Target DUV and tolerance(K)
2700k	2725 ± 145	0.000 ± 0.006
3000k	3045 ± 175	0.000 ± 0.006
3500k	3465 ± 245	0.000 ± 0.006
4000k	3985 ± 275	0.001 ± 0.006
4500k	4503 ± 243	0.001 ± 0.006
5000k	5026 ± 283	0.002 ± 0.006
5700k	5665 ± 355	0.002 ± 0.006
6500k	6530 ± 510	0.003 ± 0.006
Flexible CCT(2700-6500k)	T _P ± ΔT_P	D _{uv} ± 0.006

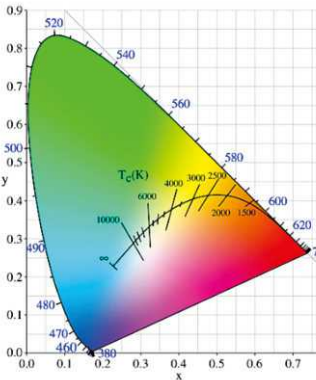


The LED lamp must have one of the rated Correlated Colour Temperatures (CCTs) including 2700K,3000K,3500K,4000K,4500K,5000K,5700K,6500K and flexible CCT consistent with the 7-step chromaticity, quadrangles and Duv tolerances as indicated in Table1.The measured initial CCT and initial DUV shall be within the tolerances of target CCT and target DUV of the selected rated CCT.



Total Harmonic Disrtortion (THD) 總諧波失真

THD 是驅動電路中的各種非線性元器件工作時產生的倍數於電源頻率 (50-60HZ) 的周期性電流電壓干擾，經驅動電路的輸入端反竄入電網迴路中，造成電網的工作頻率不純淨 (如 50HZ電網中夾雜著 100HZ、150HZ、200HZ等等的多種雜波電流)，影響其它附近的用電設備，嚴重的會竄到總電網中乾擾損壞電力設備。

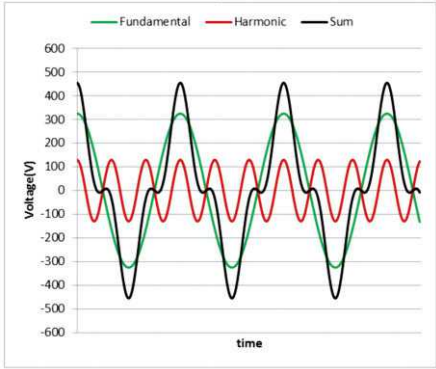

THD's dimming application scheme is the periodic current and voltage interference that multiples of the power supply frequency (50-60HZ) is generated during the operation of various non-linear components in the drive circuit, and then back into the grid circuit through the input of the drive circuit. Causes the impure working frequency of the power grid (for example, a variety of clutter currents of 100HZ, 150HZ, 200HZ, etc. are mixed in the 50HZ power grid), affects other nearby electrical equipment, and can seriously damage the power equipment by channeling into the overall power grid.

For example: various precision instruments and life support equipment have high requirements on the quality of the power supply used. If the network harmonic is too high, it will interfere with the accuracy of the instrument in the light, and it may cause the instrument to work abnormally or even not work, burn out, etc ...

例如：各種精密儀器設備、生命維持設備就對使用的電源品質要求很高，如果使用了諧波大的電網或附近有高諧波的用電設備造成電網諧波過高，輕則會干擾儀器的精度，重則可能會導致儀器工作不正常甚至不工作、燒毀等……



Lux 平均照度

平均照度應用要求照度的定義為被照體單位面積所受的光通量，其單位為勒克斯(LUX)，每一不同使用目的的場所，均有其合適的照度來配合實際需要。例如，一般家庭書房的全般照明照度約為 100 LUX，閱讀時則需要照度 600 LUX，此時可用檯燈作為局部照明，以達到所需照度。照度太低時，容易導致眼睛疲勞造成近視，照度太高則過分明亮刺眼，形成電力浪費。

照度 (LUX)	場所 辦公場所
1500~750	製圖室、設計室、辦公室
750~300	辦公室、電腦室、會議室
300~100	廁所、走廊、樓梯、休息室、其他場所
75~30	太平梯


照度 (LUX)	場所 工廠
3000~1500	組裝作業、檢查、測試、分析、超細微作業、檢查
1500~750	組裝作業、檢查、測試分析、細微作業
750~300	組裝作業、檢查、測試分析、普通作業
300~150	包裝、倉庫

Lux is defined as the average luminous flux per unit area of the subject, and its unit is lux. Every place with different usage purpose has its own suitable illumination to meet the actual needs. For example, the general illumination of an ordinary home study is about 100 LUX, while reading requires 600 LUX. At this time, a table lamp can be used as local lighting to achieve the required illuminance. When the illuminance is too low, it is easy to cause eye fatigue and myopia, and when the illuminance is too high, it is too bright and dazzling, resulting in waste of electricity.

照度 (LUX)	場所 學校
1500~300	精密製圖、精密實驗、圖書館
750~200	教室、圖書館閱覽室、教職員工休息室、體育館
300~75	演講大廳、禮堂、衣物間、走廊、樓梯、休息室
75~30	倉庫、安全梯
10~2	通道 (夜間使用)



Tube length and size specifications 管長度及尺寸規格

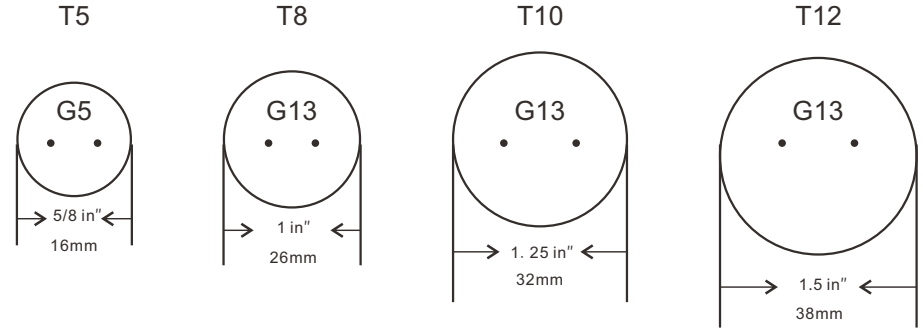

Common Certificate 常用證書

LVD
EMC/EMI
RoHS
IEC / EN 62471(光生物安全認證) 保障眼睛、皮膚安全，消除有害光線，可放心使用。

LVD
EMC/EMI
RoHS
IEC / EN 62471
(Photo biological safety certification) Ensure eye and skin safety, eliminate harmful light, can be used with confidence




09/10

Commercial LED T8 Tube

Series Type: L

Features 產品特點 >>

- Uniform light emission
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
- Optional: rotary end knob for angle adjustment
- 發光均勻
- SPM設計-電源電路保護，當個別led故障時切斷單個LED电路
- 可選配：角度調節旋鈕

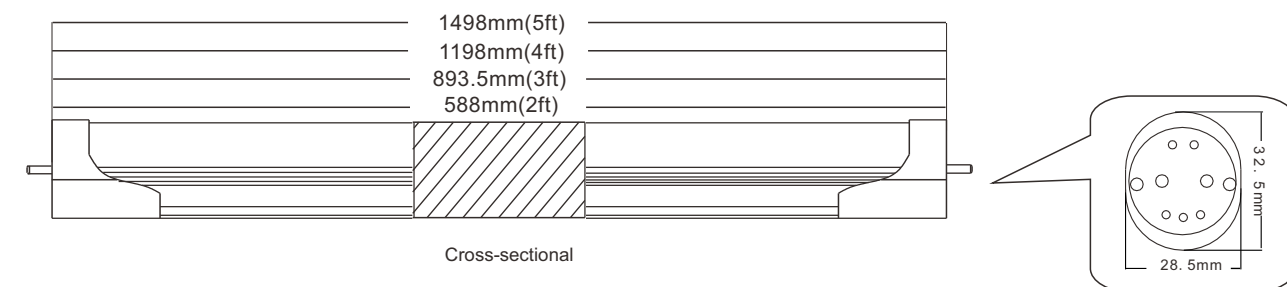

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-I0609-L128A	100~240	9	600	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I0912-L128A	100~240	12	900	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1218-L128A	100~240	18	1200	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1522-L128A	100~240	22	1500	50000	3000/4000/6500	120	>80	T8,G13	25


- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意

Wide Angle LED T8 Tube

Series Type: S

Features 產品特點 >>

- Uniform light emission
- Retrofit to existing T8 lights on EM
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
- Latest LED lighting standard IEC62560, EN62776, EN62493 certified
- Wide angle (300 degrees) for best lighting effect
- 均勻發光
- 對現有的T8燈進行改造
- SPM設計-電源電路保護，當個別led故障時切斷單個LED电路
- 最新LED照明標準IEC62560、EN62776、EN62493認證
- 廣角 (300度) 提供最佳照明效果

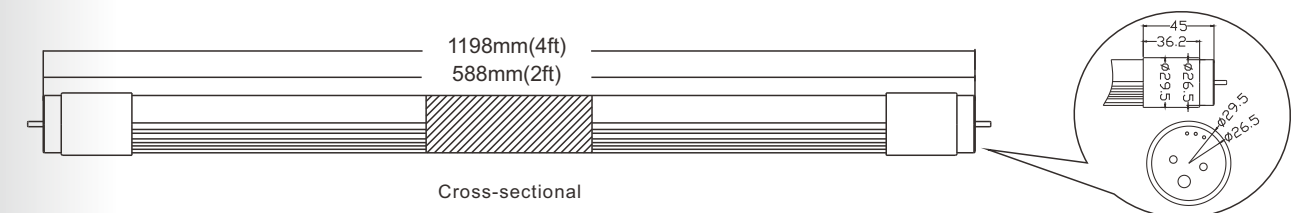

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-I0609-S128A	100~240	9	600	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1218-S128A	100~240	18	1200	50000	3000/4000/6500	120	>80	T8,G13	25


- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意

LED T5 Tube

Series Type: I5-N

Features 產品特點 >>

- Uniform light emission
 - Retrofit to existing T5 lights
 - SPM Design – power circuit protection to cut off
 - T6 tube body to achieve the best lighting effect
 - Emergency option available: compatible in use with most emergency battery brands & comply with part A11 of FSD regulation PPA104
-
- 均勻發光
 - 對現有T5燈進行改造
 - SPM設計-切斷電源電路保護
 - T6管體達到最佳照明效果
 - 可提供應急選項：與大多數應急電池品牌相容，並符合FSD法規PPA104第A11部分

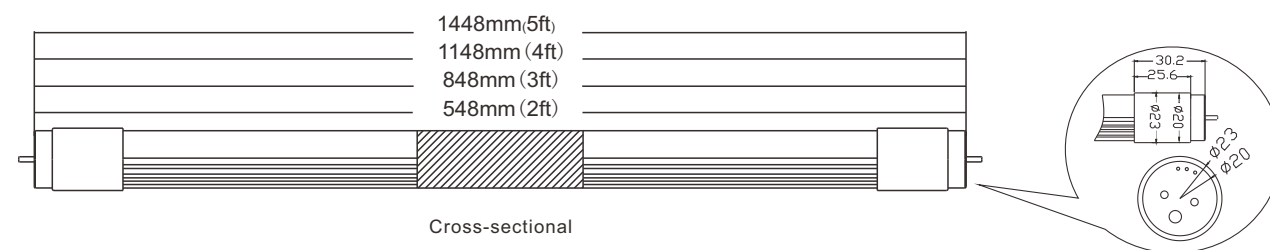

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-IS0608-N128A	100~240	8	600	50000	3000/4000/6000	120	>80	T5,G5	50
LT-IS0911-N128A	100~240	11	900	50000	3000/4000/6000	120	>80	T5,G5	50
LT-IS1216-N128A	100~240	16	1200	50000	3000/4000/6000	120	>80	T5,G5	50
LT-IS1520-N128A	100~240	20	1500	50000	3000/4000/6000	120	>80	T5,G5	50


- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意

Nano Plastic LED T8 Tube

Series Type: NP

Features 產品特點 >>

- Light body weigh, Safe to use
 - Non glare design
 - Fully sealed for use in dry or wet locations
 - Wide beam angle (> 300 degree)
 - High Power Factor >0.95
-
- 重量輕, 使用安全
 - 無眩光設計
 - 完全密封, 可在乾燥或潮濕的地方使用
 - 寬波束角 (> 300度)
 - 高功率因數>0.95

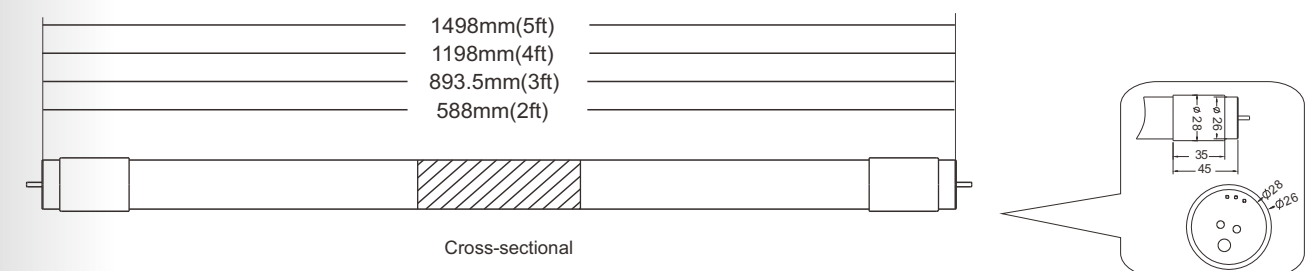

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-I0609-NP128A	100~240	9	600	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I0912-NP128A	100~240	12	900	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1218-NP128A	100~240	18	1200	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1522-NP128A	100~240	22	1500	50000	3000/4000/6500	120	>80	T8,G13	25


- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%
- 此型號認證可由實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意

Glass LED T8 Tube

Series Type: G

Features 產品特點 >>

- Uniform light emission
- High luminous output&low power consumption
- Retrofit to existing T8 lights on EM
- SPM design – Power circuit protection to cut off individual LEDs when mal-functioned
- Beam Angl : 300 degree
- 發光均勻
- 高光輸出和低功耗
- 對現有T8燈進行改進
- SPM設計即電源電路保護，在故障時可立即切斷單個LED电路
- 光束角度:300度

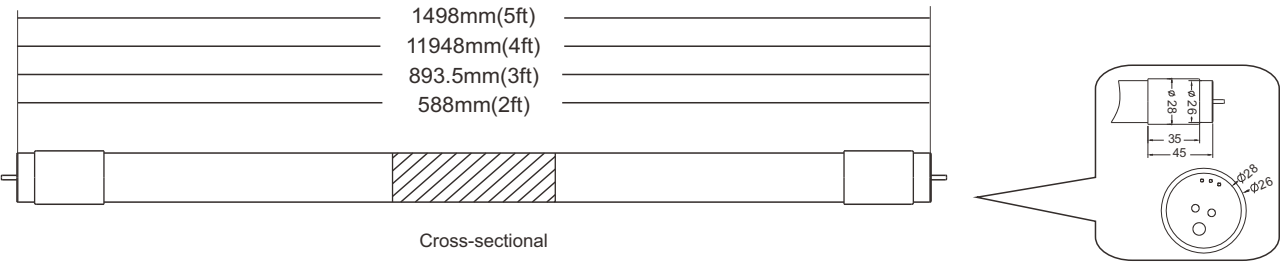

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-I0609-G128A	100~240	9	600	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I0912-G128A	100~240	12	900	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1218-G128A	100~240	18	1200	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1522-G128A	100~240	22	1500	50000	3000/4000/6500	120	>80	T8,G13	25



- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制
- 此型號標準之功率因素 (PF)>0.9，總諧波指數THD<15%，可按客戶需要生產低總諧波指數< 10%
- 此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為Exemption Group及其它測試，保證客戶使用更安心滿意

DC LED T8 Tube with External Driver

Series Type: R-N

Features 產品特點 >>

- Uniform light emission
- Retrofit to existing T8 lights on EM
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
- 發光均勻
- 對現有T8燈進行改進
- SPM設計即電源電路保護，在故障時可立即切斷單個LED电路

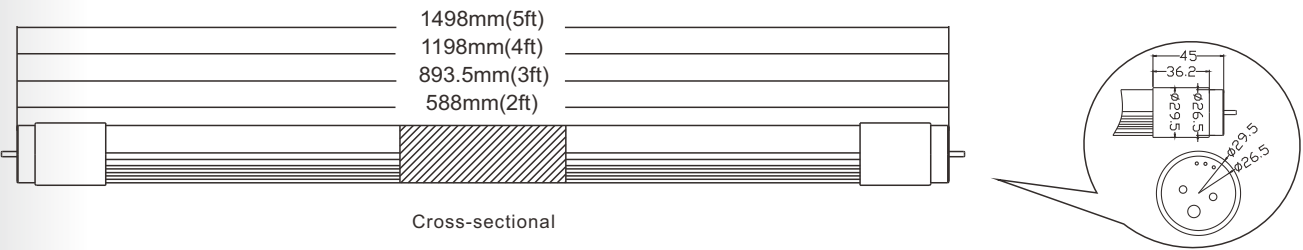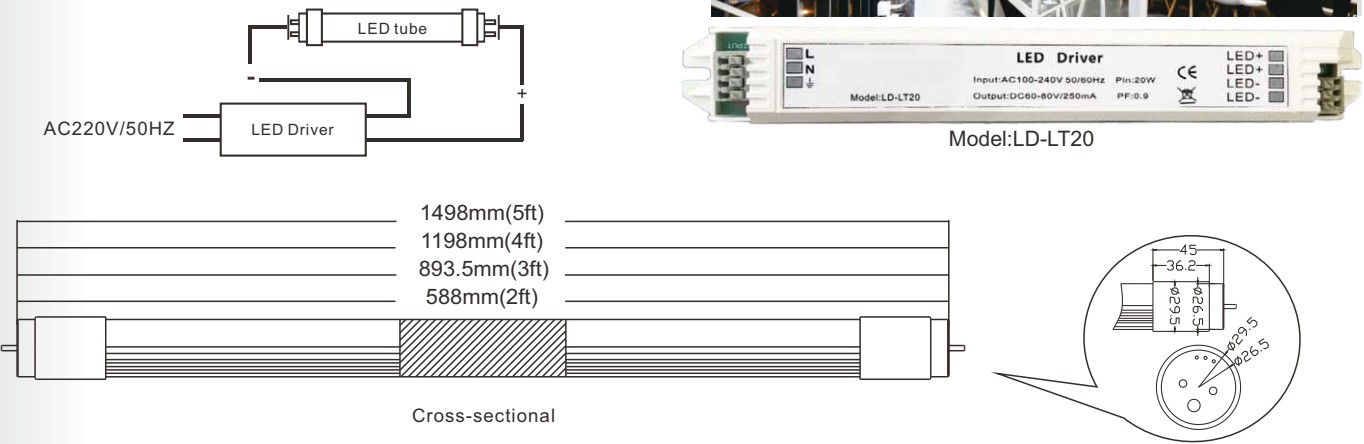

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-R0609-N128A	30-42	9	600	50000	4000	120	>80	T8,G13	25
LT-R0912-N128A	30-42	12	900	50000	4000	120	>80	T8,G13	25
LT-R1218-N128A	30-42	18	1200	50000	4000	120	>80	T8,G13	25
LT-R1522-N128A	30-42	22	1500	50000	4000	120	>80	T8,G13	25

- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制
- 此型號標準之功率因素 (PF)>0.9，總諧波指數THD<15%，可按客戶需要生產低總諧波指數< 10%
- 此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為Exemption Group及其它測試，保證客戶使用更安心滿意


High Performance LED T8/T5 Tube

Series Type: N-T5G5

Features 產品特點 >>

- Uniform light emission
- Retrofit to existing T5 lights
- SPM design-Power circuit protection to cut off individual LEDs when mal-functioned
- T8 tube body to achieve the best lighting effect

- 發光均勻
- 對現有T5燈進行改進
- SPM設計即電源電路保護,在故障時可立即切斷單個LED电路
- T8管體達到最佳照明效果

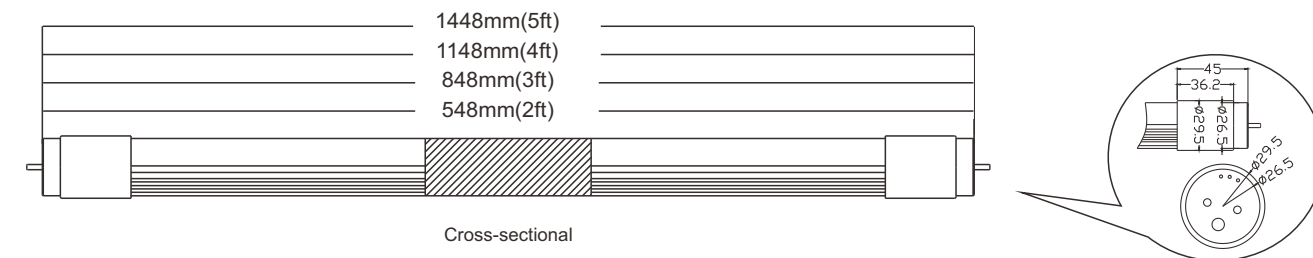

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-I0609-N128A-T5G5	100~240	9	600	50000	3000/4000/6500	120	>80	T5,G5	25
LT-I0912-N128A-T5G5	100~240	12	900	50000	3000/4000/6500	120	>80	T5,G5	25
LT-I1218-N128A-T5G5	100~240	18	1200	50000	3000/4000/6500	120	>80	T5,G5	25
LT-I1522-N128A-T5G5	100~240	22	1500	50000	3000/4000/6500	120	>80	T5,G5	25

- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality

- 光效(lm/W)、功率(W)、顯色指數(CRI),可根據客戶需求定制
- 此型號標準之功率因素(PF)>0.9,總諧波指數THD<15%,可按客戶需要生產低總諧波指數<10%
- 此型號認證由可實驗室發出之安全認證消防測試,環保物料(RoHS),光生物安全為Exemption Group及其它測試,保證客戶使用更安心滿意


High Power LED T8 Tube

Series Type: L-HP

Features 產品特點 >>

- Uniform light emission
- Retrofit to existing T8 lights on EM
- SPM design-Power circuit protection to cut off individual LEDs when mal-functioned
- Latest LED lighting standard IEC62560, EN62776, EN62493 certified
- Photo-biological test IEC62471 certification – exemption group

- 發光均勻
- 對現有的T8燈進行改造
- SPM設計即電源電路保護,在故障時可立即切斷單個LED电路
- 獲得最新的LED照明標準IEC62560, EN62776, EN62493認證
- 光生物測試IEC62471認證-豁免組別

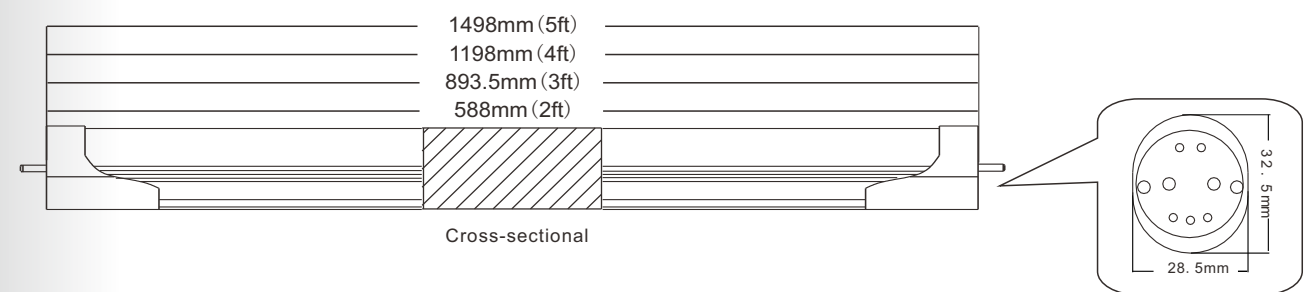

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-I0615-L128A-HP	100~240	15	600	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I0922-L128A-HP	100~240	22	900	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1230-L128A-HP	100~240	30	1200	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1538-L128A-HP	100~240	38	1500	50000	3000/4000/6500	120	>80	T8,G13	25

- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality


- 光效(lm/W)、功率(W)、顯色指數(CRI),可根據客戶需求定制
- 此型號標準之功率因素(PF)>0.9,總諧波指數THD<15%,可按客戶需要生產低總諧波指數<10%
- 此型號認證由可實驗室發出之安全認證消防測試,環保物料(RoHS),光生物安全為Exemption Group及其它測試,保證客戶使用更安心滿意

High Lumen and Power T5 LED Tube

Series Type: I5-G

Features 產品特點 >>

- Uniform light emission
 - Retrofit to existing T5 lights
 - SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
 - T5 tube body to achieve the best lighting effect
-
- 發光均勻
 - 對現有的T5燈進行改造
 - SPM設計即電源電路保護，在故障時可立即切斷單個LED電路
 - T5管體到最佳照明效果

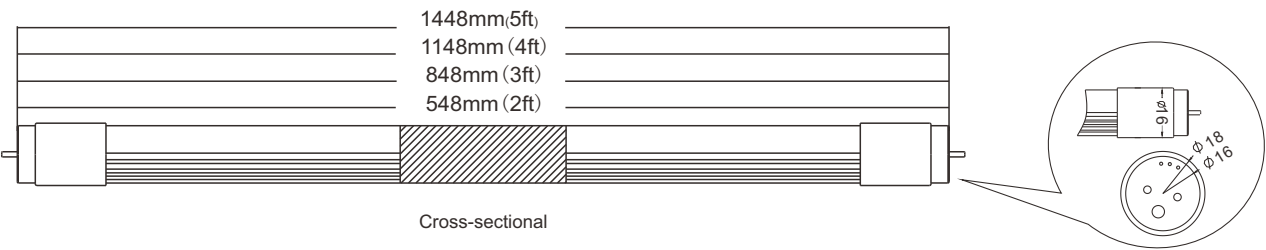

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-I50608-G148A	100~240	8	600	50000	3000/4000/6000	140	>80	T5,G5	50
LT-I50912-G148A	100~240	12	900	50000	3000/4000/6000	140	>80	T5,G5	50
LT-I51216-G148A	100~240	16	1200	50000	3000/4000/6000	140	>80	T5,G5	50
LT-I51520-G148A	100~240	20	1500	50000	3000/4000/6000	140	>80	T5,G5	50

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
 - Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
 - This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality
-
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制
 - 此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%
 - 此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意

Sensor Lighting

傳感器應用照明




Microwave Sensor LED T8 Tube

Series Type: M

Features 產品特點 >>

- Microwave controlled internal sensor detection distance of 6-8M
- Full lumen in activation mode 30% lumen in standby mode
- Direct replacement of FL tubes in electro-magnetic ballast fitting
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
- Exit time 15-60seconds
- Emergency option available: compatible in use with most emergency battery brands & comply with part A11of FSD regulation PPA104
- 微波控制內部感測器,感測器檢測距離6-8米
- 啟動模式下為全流明,待機模式下為30%流明
- 可直接更換電磁鎮流器配件中的FL管
- SPM設計-電源電路保護,當個別led故障時切斷單個LED电路
- 退出時間15-60秒
- 提供應急選項:與大多數應急電池品牌相容,並符合FSD法規PPA104第A11部分

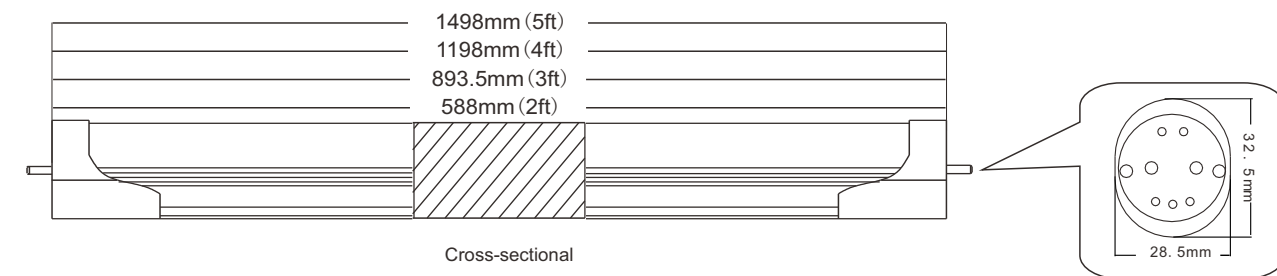

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-I0609-M128A	100~240	9	600	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I0912-M128A	100~240	12	900	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1218-M128A	100~240	18	1200	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1522-M128A	100~240	22	1500	50000	3000/4000/6500	120	>80	T8,G13	25


- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) >0.9, 總諧波指數THD<15%, 可按客戶需要生產低總諧波指數< 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為Exemption Group及其它測試, 保證客戶使用更安心滿意

Infrared Sensor LED T8 Tube

Series Type: IR

Features 產品特點 >>

- Uniform light emission
- High luminous output & low power consumption
- SPM design – Power circuit protection to cut off individual LEDs when mal-functioned
- Exit Time 15-60 seconds
- Detection distance(6-8m)
- 發光均勻
- 高流明輸出的同時低功耗
- SPM設計即電源電路保護, 在故障時可立即切斷單個LED电路
- 退出時間15-60秒
- 探測距離 (6-8米)

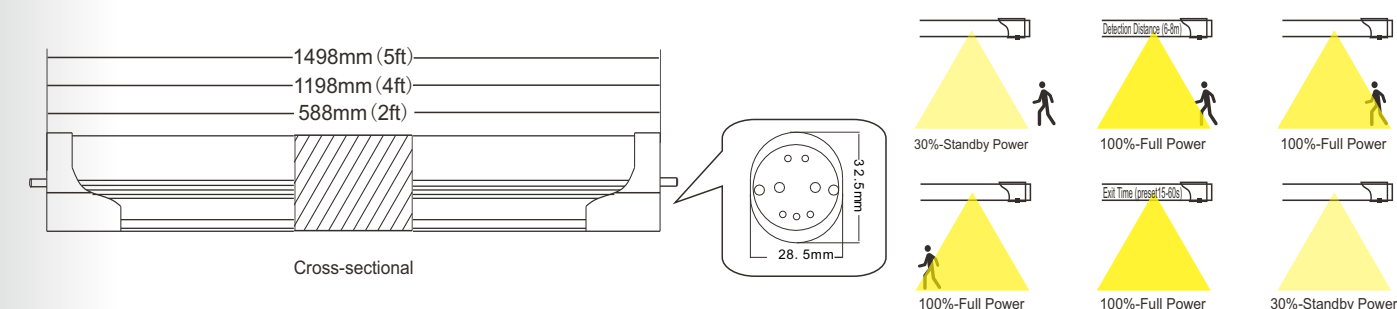

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(Pcs)
LT-I0609-IR128A	100~240	9	600	50000	6000	120	>80	25
LT-I1218-IR128A	100~240	18	1200	50000	6000	120	>80	25
LT-I1522-IR128A	100~240	22	1500	50000	6000	120	>80	25



- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) >0.9, 總諧波指數THD<15%, 可按客戶需要生產低總諧波指數< 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為Exemption Group及其它測試, 保證客戶使用更安心滿意

Sound Control LED T8 Tube

Series Type: V

Features 產品特點 >>

- Uniform light emission
- SPM design – Power circuit protection to cut off individual LEDs when mal-functioned
- Exit Time 15-60 seconds
- Sound sensitivity 35 - 60B(decibel)
- 發光均勻
- SPM設計即電源電路保護, 在故障時可立即切斷單個LED電路
- 退出時間15-60秒
- 聲音靈敏度35-60B(分貝)

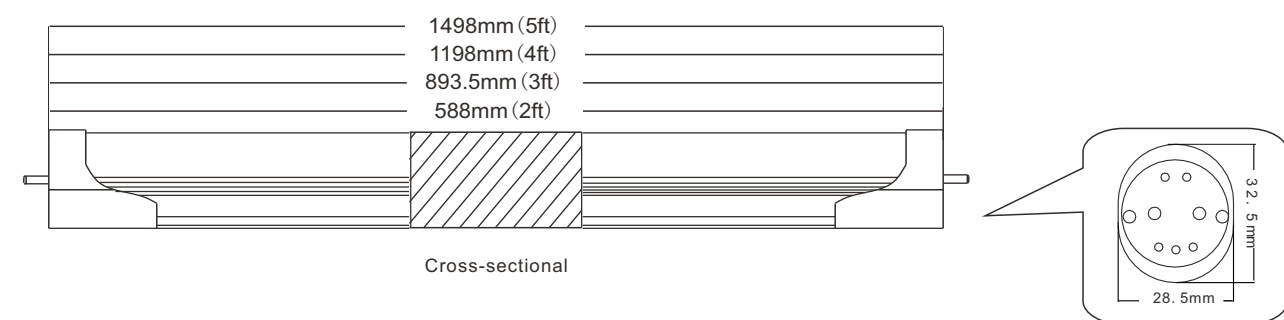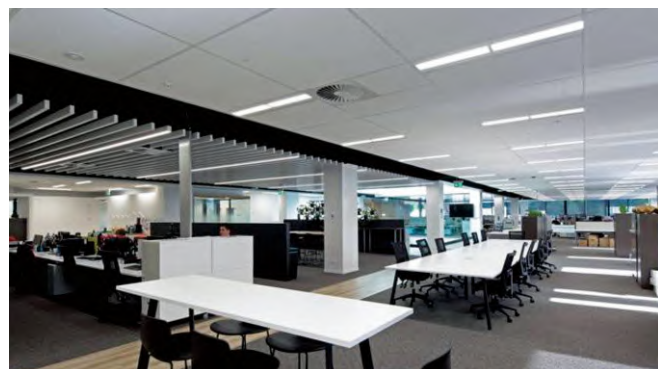

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Lamp Base 顯色度	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(Pcs)
LT-I0609-V128A	100~240	9	600	50000	3000/4000/6500	120	>80	25
LT-I0912-V128A	100~240	12	900	50000	3000/4000/6500	120	>80	25
LT-I1218-V128A	100~240	18	1200	50000	3000/4000/6500	120	>80	25
LT-I1522-V128A	100~240	22	1500	50000	3000/4000/6500	120	>80	25



- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意

Programmable Microwave Sensor LED T5 Tube

Series Type: PM

Features 產品特點 >>

- Microwave controlled internal sensor
- Sensor detection distance of 3-8 meter (user selectable)
- 0%-90% lumen in standby mode (user selectable)
- 5s-60mins Delay/exit time in standby mode
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
- Compatible in use with most emergency battery brands
- 微波控制內部感測器 感測器探測距離3-8米(用戶可選擇)
- 0%-90%流明(用戶可選擇)
- 待機狀態下延時/退出時間5秒-60分鐘
- SPM設計-電源電路保護, 在故障時切斷單個LED
- 與大多數應急電池品牌相容

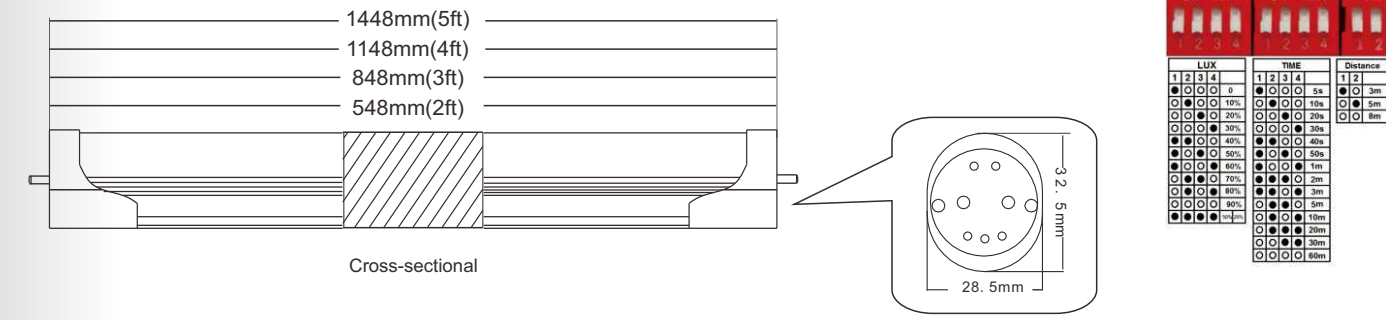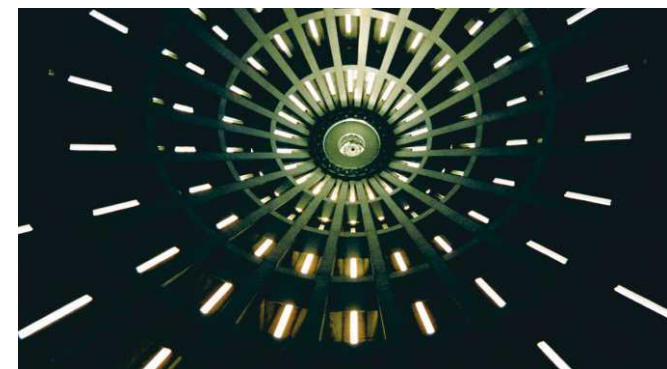

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-I0609-PM128A	100~240	9	600	50000	3000/4000/6500	120	>80	T5,G5	25
LT-I0912-PM128A	100~240	12	900	50000	3000/4000/6500	120	>80	T5,G5	25
LT-I1218-PM128A	100~240	18	1200	50000	3000/4000/6500	120	>80	T5,G5	25
LT-I1522-PM128A	100~240	22	1500	50000	3000/4000/6500	120	>80	T5,G5	25


- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意

Photosensor LED T8 Tube

Series Type:PS

Features 產品特點 >>

- Uniform light emission
- Retrofit to existing T8 lights on EM
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
- Function: the light control probe senses the brightness of the surrounding environment in real time. According to the intensity of the brightness of the environment, it is divided into two sections of light output. When the light is strong, it is output at 30% power (can be designed) and when the light is weak, it is output at 100% power.
- 發光均勻
- 對現有的T8燈進行改造
- SPM設計即電源電路保護，在故障時可立即切斷單個LED电路
- 功能：光控探頭實時感應周圍環境亮度，根據環境亮度的強弱分2段光輸出，光線較強時以30%功率（可指定設計）輸出，光線較弱時100%功率輸出。

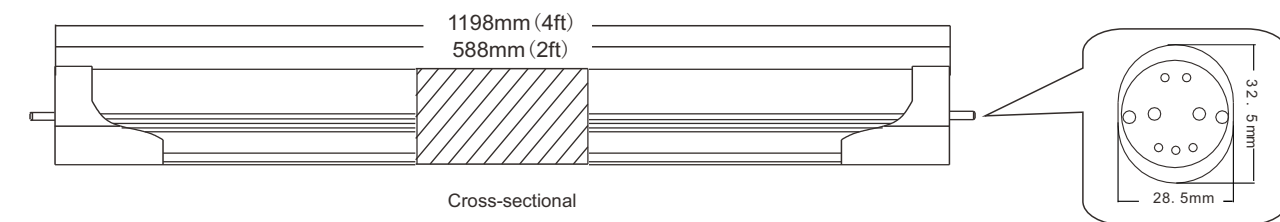

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
LT-I0609-PS128A	100~240	9	600	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1218-PS128A	100~240	18	1200	50000	3000/4000/6500	120	>80	T8,G13	25


- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制
- 此型號標準之功率因素 (PF)>0.9，總諧波指數THD<15%，可按客戶需要生產低總諧波指數<10%
- 此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為Exemption Group及其它測試，保證客戶使用更安心滿意

Photosensor & Timer ON/OFF T8 Tube

Series Type:PS-T

Features 產品特點 >>

- Uniform light emission
- Retrofit to existing T8 lights on EM
- SPM design-Power circuit protection to cut off individual LEDs when mal-functioned
- Function: the light control probe senses the brightness of the surrounding environment in real time. According to the intensity of the brightness of the environment, it is divided into two sections of light output. When the light is strong, it is output at 30% power (can be designed) and when the light is weak, it is output at 100% power.
- 發光均勻
- 對現有的T8燈進行改造
- SPM設計即電源電路保護，在故障時可立即切斷單個LED电路
- 功能：光控探頭實時感應周圍環境亮度，根據環境亮度的強弱分2段光輸出，光線較強時以30%功率（可指定設計）輸出，光線較弱時100%功率輸出。

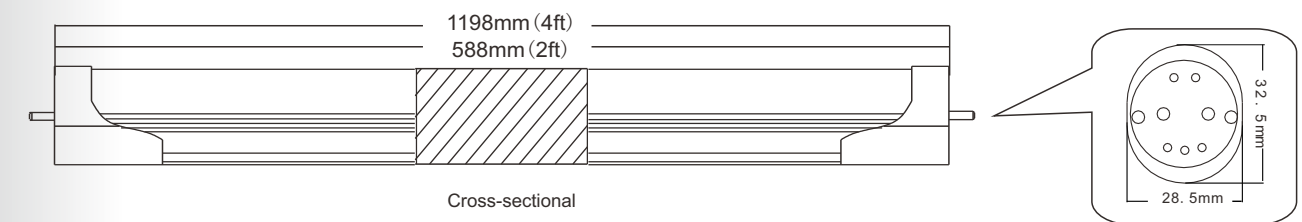

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
LT-I0609-PS-T128A	100~240	9	600	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1218-PS-T128A	100~240	18	1200	50000	3000/4000/6500	120	>80	T8,G13	25


- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制
- 此型號標準之功率因素 (PF)>0.9，總諧波指數THD<15%，可按客戶需要生產低總諧波指數<10%
- 此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為Exemption Group及其它測試，保證客戶使用更安心滿意

Anti Microwave Sensor LED T8 tube

Series Type: M-AI

Features 產品特點 >>

- Anti-interference design -2 pcs microwave sensor tubes put into double tube batten, In close area not interfere each other sensing operation
- Sensor detection distance of 6-8 meter, Full lumen in activation mode, 30% lumen in standby mode
- No interference from heat source and light source, high stability, long sensing distance
- It has high sensitivity and no blind area. When there is an object moving, it will be sensed
- Easy to install, strong hiding ability, can penetrate acrylic and other panels
- 抗干擾設計, 可以在雙支架下, 近距離放二支微波燈管, 而不相互干擾 波威應操作
- 感測器探測距離6-8米, 啟動模式下全流明, 待機模式下30%流明
- 不受熱源和光源干擾, 穩定性高, 感應距離遠
- 感應靈敏度高, 無盲區, 有物體移動就會感應
- 便於安裝, 隱避性強, 可穿透亞克力等面板

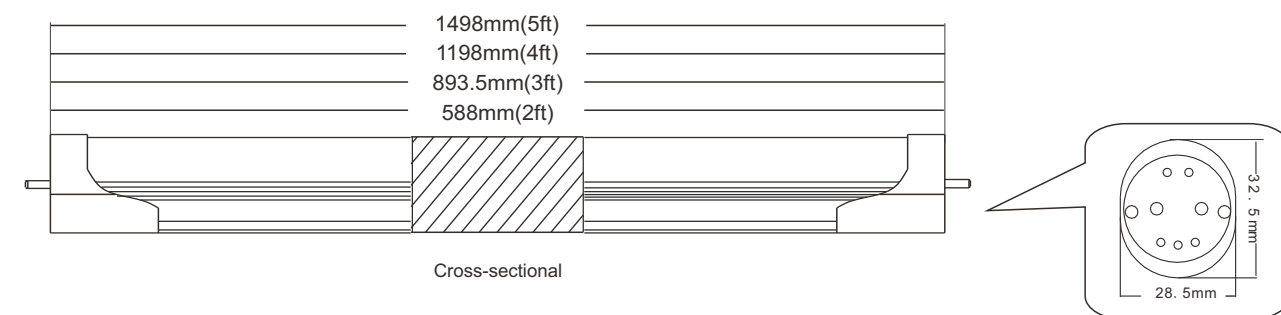

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-I0609-M128A-AI	100~240	9	600	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I0912-M128A-AI	100~240	12	900	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1218-M128A-AI	100~240	18	1200	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1522-M128A-AI	100~240	22	1500	50000	3000/4000/6500	120	>80	T8,G13	25

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意

Microwave Sensor+Sound Control LED T8 tube


Series Type: MV

Features 產品特點 >>

- Uniform light emission
- SPM design – Power circuit protection to cut off individual LEDs when malfunctioned
- Exit Time 15-60 seconds, Sound sensitivity 35-60B (decibel)
- Microwave controlled internal sensor, sensor detection distance of 6-8M
- Full lumen in activation mode, 30% lumen in standby mode
- Direct replacement of FL tubes in electro-magnetic ballast fitting
- Emergency option available: compatible in use with most emergency battery brands & comply with part A of FSD regulation PPA104



- 均勻發光
- SPM設計即電源電路保護, 在故障時可立即切斷單個LED電路
- 退出時間15-60秒, 聲音靈敏度35-60B (分貝)
- 微波控制內部感測器, 感測器探測距離6-8米, 啟動模式下全流明, 待機模式下30%流明
- 直接更換熒光燈管電磁鎮流器配件
- 提供應急選項: 與大多數應急電池品牌相容, 並符合FSD法規PPA104第A11部分

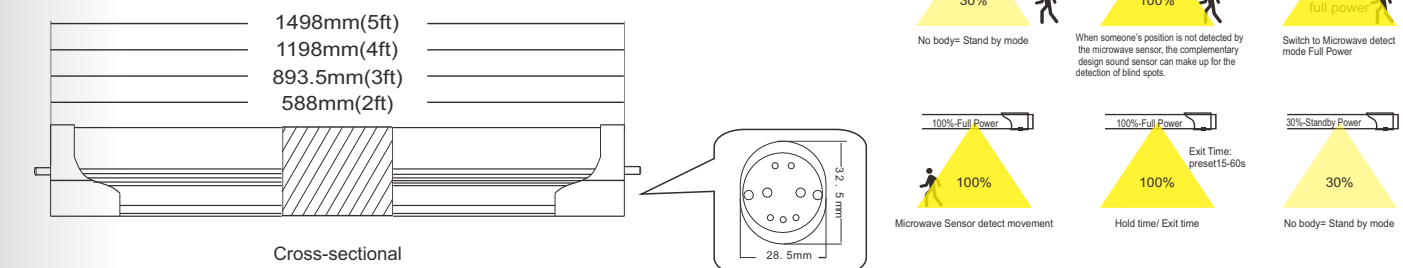

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-I0609-MV128A	100~240	9	600	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I0912-MV128A	100~240	12	900	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1218-MV128A	100~240	18	1200	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1522-MV128A	100~240	22	1500	50000	3000/4000/6500	120	>80	T8,G13	25


- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意

Series Type: R-MD


Features 產品特點 >>

- Flicker free
- Dimming interface : 0-10V Dim
- Dimming range from 100% to(100%,85%,75%,50%)

- 無閃頻
- 調光介面:0-10V調光
- 調光範圍從100%到(100%,85%,75%,50%)

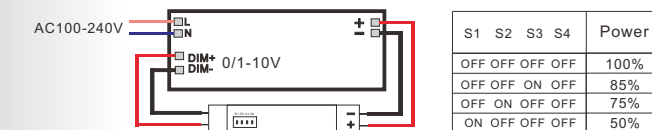

Model:DC-LT12-DIM-010

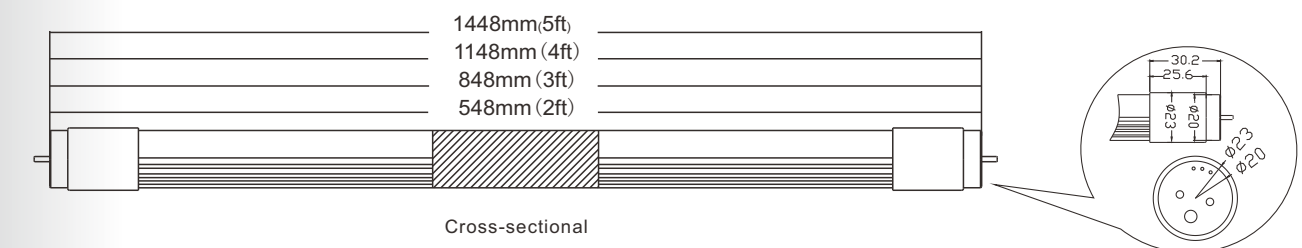

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-R60610-MD128A	30-42	10	600	50000	4000	120	>80	T5,G5	25
LT-R60913-MD128A	30-42	13	900	50000	4000	120	>80	T5,G5	25
LT-R61219-MD128A	30-42	19	1200	50000	4000	120	>80	T5,G5	25
LT-R61524-MD128A	30-42	24	1500	50000	4000	120	>80	T5,G5	25

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證可由實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意


Manual Preset Power Consumption AC T8 Tube

Series Type: DP-SW

Features 產品特點 >>

- Uniform light emission
- With 4 position dip switch selector
- Dimming range from 100% to 50% (100%, 85%, 75%, 50%)
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
- 發光均勻
- 帶4比特dip開關選擇器
- 調光範圍從100%到50% (100%, 85%, 75%, 50%)
- SPM設計即電源電路保護，在故障時可立即切斷單個LED电路

S1	S2	S3	S4	Power
OFF	OFF	OFF	OFF	100%
OFF	OFF	ON	OFF	85%
OFF	ON	OFF	OFF	75%
ON	OFF	OFF	OFF	50%

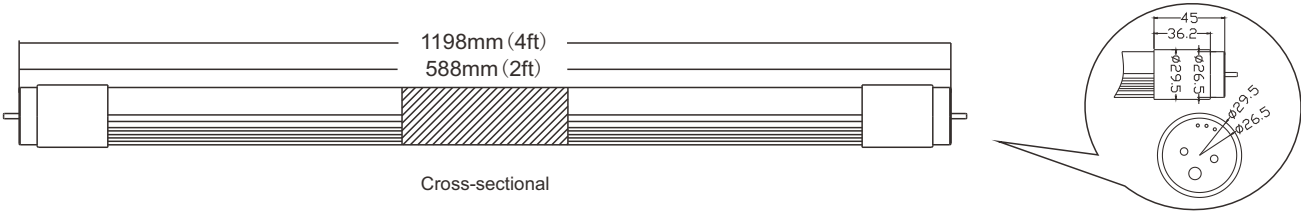

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-I0609-DP128A-SW	100~240	9	600	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1218-DP128A-SW	100~240	18	1200	50000	3000/4000/6500	120	>80	T8,G13	25


- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) >0.9, 總諧波指數THD<15%, 可按客戶需要生產低總諧波指數< 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為Exemption Group及其它測試, 保證客戶使用更安心滿意

Time Control ON/OFF LED T8 Tube

Series Type: TC

Features 產品特點 >>

- Uniform light emission
- Retrofit to existing T8 lights on EM
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
- Photo-biological test IEC62471 certification – exemption group
- 發光均勻
- 對現有的T8燈進行改造
- SPM設計即電源電路保護，在故障時可立即切斷單個LED电路
- 光生物試驗IEC62471認證-豁免組

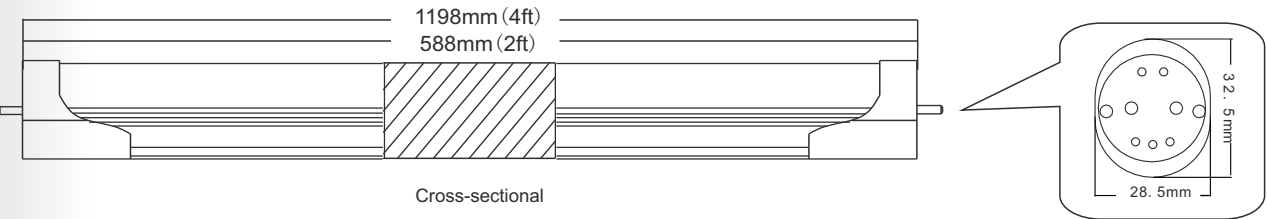

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-I0609-TC128A	100~240	9	600	50000	3000/4000/6000	120	>80	T8,G13	25
LT-I1218-TC128A	100~240	12	1800	50000	3000/4000/6000	120	>80	T8,G13	25

- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) >0.9, 總諧波指數THD<15%, 可按客戶需要生產低總諧波指數< 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為Exemption Group及其它測試, 保證客戶使用更安心滿意

Time Control ON/OFF LED T8 Tube (Dip Switch Selector)

Series Type: TC-DL

Features 產品特點 >>

- Dial from minimum 0.5 hours to combined 24-hour delay switch
- setting operate day by day
- Uniform light emission
- Retrofit to existing T8 lights on EM
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
- Photo-biological test IEC62471 certification – exemption group

- 撥碼由最小0.5小時至組合24小時延時組合
- 設置每天運行
- 發光均勻
- 對現有的T8燈進行改造
- SPM設計即電源電路保護, 在故障時可立即切斷單個LED電路
- 光生物試驗IEC62471認證-豁免組




Flick Free
(無閃頻)
保護視力



拨码延时的设置方法

	拨码开关					
	S1	S2	S3	S4	S5	S6
对应增加时间 (H)	0.5	1	2	4	8	16
总延时时间 = S1+S2+S3+S4+S5+S6						

• 把拨码开关S7—S10全部置0 (设置亮度为0) S1—S6按下表设置循环延时时间

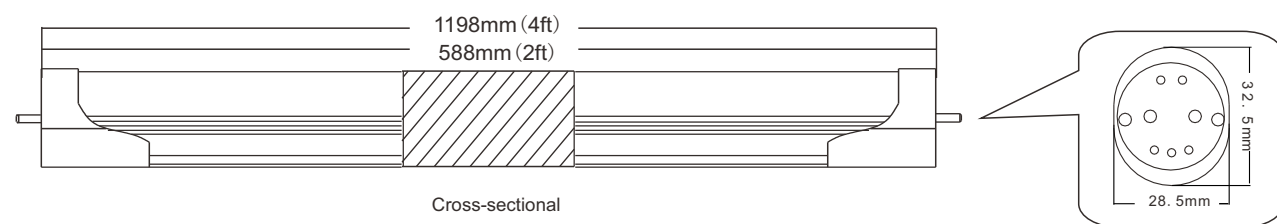

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-I0609-TC128A-DL	100~240	9	600	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1218-TC128A-DL	100~240	18	1200	50000	3000/4000/6500	120	>80	T8,G13	25

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可靠實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意

Dimming Lighting

調光應用照明


Plant Growth LED T8 Tube

Series Type: PLT

Features 產品特點 >>

- This indoor led grow light emits most of light spectrum which can be absorbed by plants effectively
- The full light spectrum is from 400-800nm
- It is applicable to all stages of plant growth
- It is suggested to keep the light from plants at least 12 inches (30cm) away from plants to prevent leaf burn and give plants 12 to 14 hours of light per day
- This led plant growing light can be used in greenhouses, plant factory, greenhouse farming, flower farming, indoor gardens, water soluble breeding

- 這種室內led生長燈發出的大部分光譜能被植物有效吸收
- 全光譜範圍為400-800nm 適用於植物生長的各個階段
- 建议远离植物的光照至少12英寸(30厘米), 以防止叶子被晒伤, 每天给植物12到14小时的光照
- 這種led植物生長燈可用於溫室、植物工廠、溫室種植、花卉種植、室內花園、水溶性育種

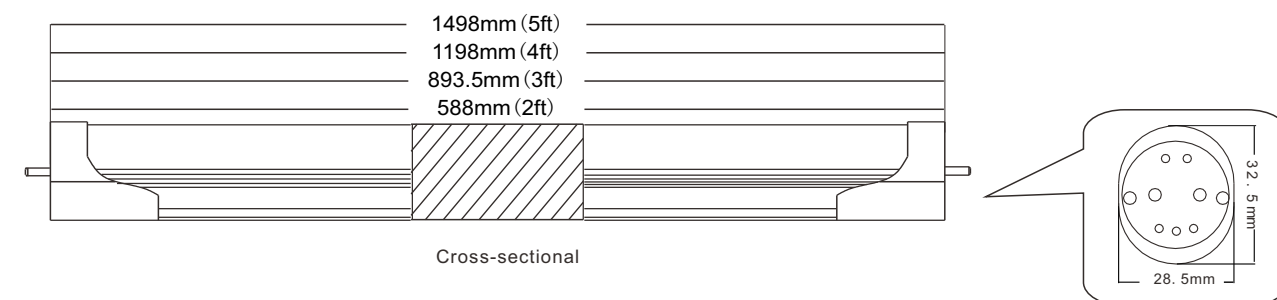

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(Pcs)
LT-I0609-PLT128A	100~240	9	600	50000	Full Spectrum	120	>80	25
LT-I0912-PLT128A	100~240	12	900	50000	Full Spectrum	120	>80	25
LT-I1218-PLT128A	100~240	18	1200	50000	Full Spectrum	120	>80	25
LT-I1522-PLT128A	100~240	22	1500	50000	Full Spectrum	120	>80	25

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意


Phase Control Dimming T8 LED Tube

Series Type: PD

Features 產品特點 >>

- Dimming interface : Traic / ELV, Push Dim
- Apply to leading edge and trailing edge TRAIC dimmers
- PWM digital dimming , no alter LED color rendering index
- High frequency PWM dimming
- Dimming range from 0-100% Efficiency > 85%
- Short Circuit / Over-temperature/ Over Load / Over Voltage Protection
- Suitable for indoor environments

- 調光介面: Traic/ELV, 按鍵調光
- 適用於前緣和後緣尾部調光器
- PWM數位調光, 不改變LED顯色指數高頻PWM調光
- 調光範圍0-100% 效率>85%
- 短路/過熱/超載/過壓保護
- 適合室內環境

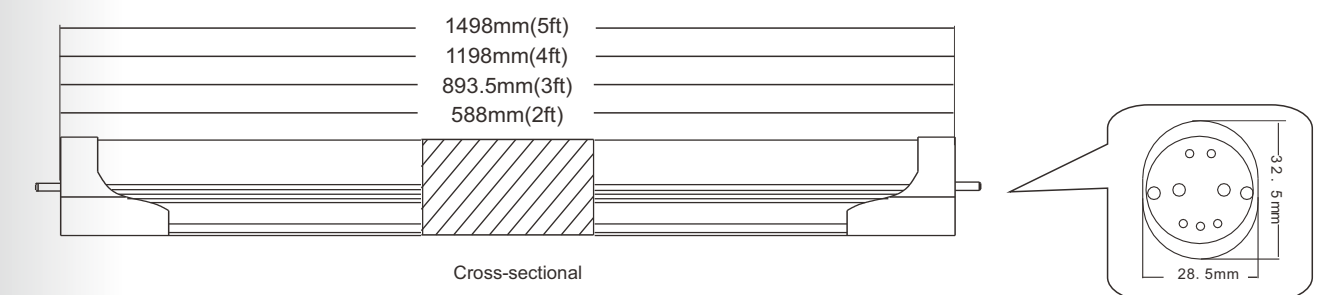

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(Pcs)
LT-I0609-PD128A	100~240	9	600	50000	3000/4000/6500	120	>80	25
LT-I0912-PD128A	100~240	12	900	50000	3000/4000/6500	120	>80	25
LT-I1218-PD128A	100~240	18	1200	50000	3000/4000/6500	120	>80	25
LT-I1522-PD128A	100~240	22	1500	50000	3000/4000/6500	120	>80	25

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality

- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意


Dimmable LED T8 DC Tube & 0-10V LED Driver

Series Type: R-N


Features 產品特點 >>

- Dimming interface:0-10V Dim
- Apply to leading edge and trailing edge 0-10V dimmers
- Dimming range from 0-100%
- Compliant with safety extra low voltage standard

- 調光介面:0-10V調光
- 適用於前緣和後緣0-10V調光器
- 調光範圍0-100%
- 符合安全特低電壓標準相容

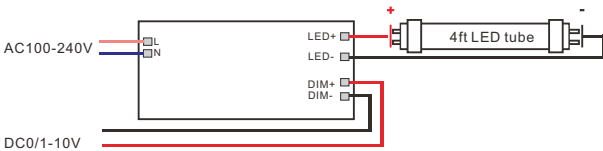

Model:DC-LT12-DIM-010

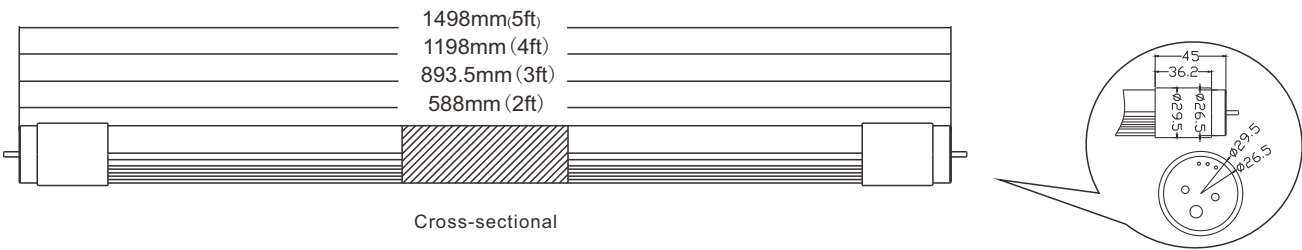

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-R0609-N128A	30-42	9	600	50000	4000	120	>80	T8,G13	25
LT-R0912-N128A	30-42	12	900	50000	4000	120	>80	T8,G13	25
LT-R1218-N128A	30-42	18	1200	50000	4000	120	>80	T8,G13	25
LT-R1522-N128A	30-42	22	1500	50000	4000	120	>80	T8,G13	25

- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality

- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) >0.9, 總諧波指數THD<15%, 可按客戶需要生產低總諧波指數< 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為Exemption Group及其它測試, 保證客戶使用更安心滿意


Dimmable LED T8 DC Tube & DALI LED Driver

Series Type: R-S


Features 產品特點 >>

- Dimming interface : DALI DALI control standard IEC62386
- Constant current output, parameters can be customized to 12W Class 2 LED power supply, Double-isolated
- Short circuit, over current and over voltage protection, Efficiency up to 83%
- DALI control input<2mA,5-100% logarithmic dimming range
- Compatible with many kinds of dimming system, such as Philips, Osram, Tridonic, Siemens, Lutron, KNX etc

- 調光介面:DALI DALI 控制標準:IEC62386
- 恒流輸出, 參數可定制12W二級LED電源, 雙隔離
- 短路、過流、過電壓保護, 效率高達83%
- DALI控制輸入<2mA, 5-100%對數調光範圍
- 相容飛利浦、歐司朗、Tridonic、西門子、盧特龍、KNX等多種調光系統

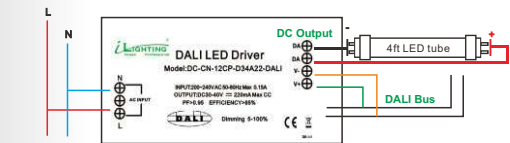

Model:DC-CN-12CP

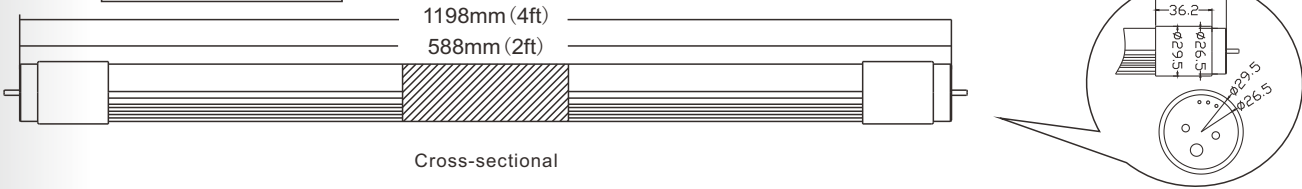

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-R0609-S128A	30-42	9	600	50000	3000/4000/6500	120	>80	T8,G13	25
LT-R1218-S128A	30-42	18	1200	50000	3000/4000/6500	120	>80	T8,G13	25

- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality


- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) >0.9, 總諧波指數THD<15%, 可按客戶需要生產低總諧波指數< 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為Exemption Group及其它測試, 保證客戶使用更安心滿意

Bluetooth4.0 LED T8 Tube

Series Type: SC-BT

Features 產品特點 >>

- Bluetooth adopts wireless technologies such as fast frequency hopping and time division multiple access to replace cables. low-cost and low-power
- Control the switch, strength and color of LED light through Bluetooth
- Dimming Signal: 2.4GHz Bluetooth 4.0
- Dimming Range: 30%, 50%, 70%,100%
- 藍牙採用快速跳頻、時分多址等無線技術代替光纜，低成本、低功耗
- 通過藍牙控制LED燈光的開關、強弱及顏色
- 調光訊號：2.4GHz藍牙4.0
- 調光範圍：30%、50%、70%、100%

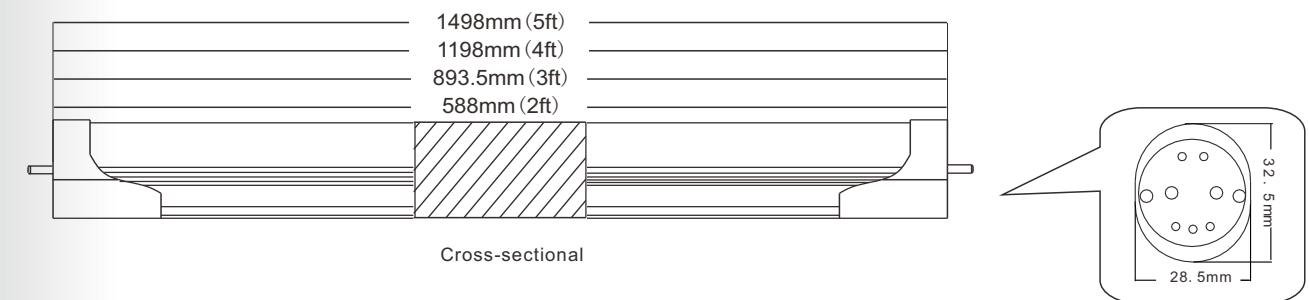

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Dimming 調光	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-I0609-SC138A-BT	100~240	9	600	50000	3000/4000/6500	130	>80	0-100%	25
LT-I0912-SC138A-BT	100~240	12	900	50000	3000/4000/6500	130	>80	0-100%	25
LT-I1218-SC138A-BT	100~240	18	1200	50000	3000/4000/6500	130	>80	0-100%	25
LT-I1522-SC138A-BT	100~240	22	1500	50000	3000/4000/6500	130	>80	0-100%	25

- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制
- 此型號標準之功率因素 (PF)>0.9，總諧波指數THD<15%，可按客戶需要生產低總諧波指數<10%
- 此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為Exemption Group及其它測試，保證客戶使用更安心滿意

Wireless Lighting


無線應用照明

Bluetooth4.0 Slave LED T8 Tube

Series Type: SL-BT

Features 產品特點 >>

- Bluetooth adopts wireless technologies such as fast frequency hopping and time division multiple access to replace cables. low-cost and low-power
- Control the switch, strength and color of LED light through Bluetooth
- Dimming Signal: 2.4GHz Bluetooth 4.0
- Dimming Range: 30%, 50%, 70%,100%
- 藍牙採用快速跳頻、時分多址等無線技術代替光纖,低成本、低功耗
- 通過藍牙控制LED燈光的開關、強弱及顏色
- 調光訊號:2.4GHz藍牙4.0
- 調光範圍:30%、50%、70%、100%

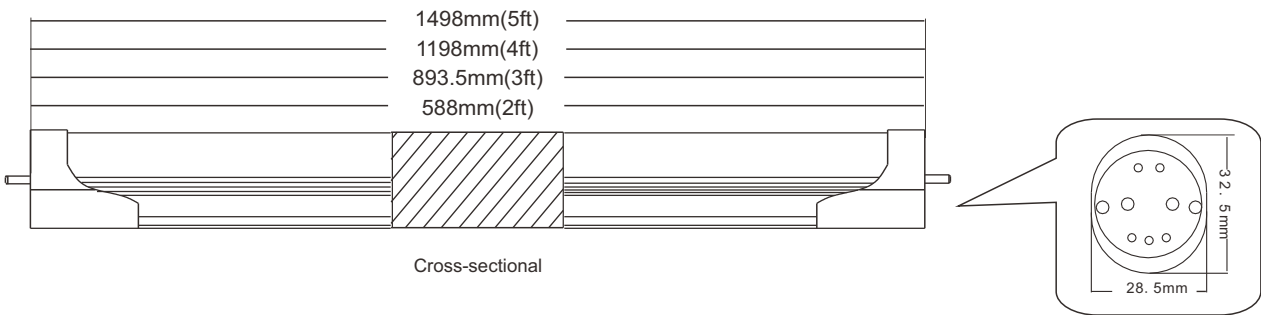

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(Pcs)
LT-I0609-SL128A-BT	100~240	9	600	50000	3000/4000/6500	120	>80	25
LT-I0912-SL128A-BT	100~240	12	900	50000	3000/4000/6500	120	>80	25
LT-I1218-SL128A-BT	100~240	18	1200	50000	3000/4000/6500	120	>80	25
LT-I1522-SL128A-BT	100~240	22	1500	50000	3000/4000/6500	120	>80	25


- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) >0.9, 總諧波指數THD<15%, 可按客戶需要生產低總諧波指數< 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為Exemption Group及其它測試, 保證客戶使用更安心滿意

Bluetooth4.0 & Microwave Master LED T8 Tube

Series Type: MW-MS-BT

Features 產品特點 >>

- Microwave controlled internal sensor, Sensor detection distance of 6-8 meter, Full lumen in activation mode
- Control the switch, strength and color of LED light through Bluetooth
- Dimming Signal: 2.4GHz Bluetooth 4.0
- Dimming Range: 30%, 50%, 70%
- 微波控制內部感測器, 感測器探測距離6-8米, 啟動模式下全流明
- 通過藍牙控制LED燈光的開關、強弱及顏色
- 調光訊號:2.4GHz藍牙4.0
- 調光範圍:30%、50%、70%

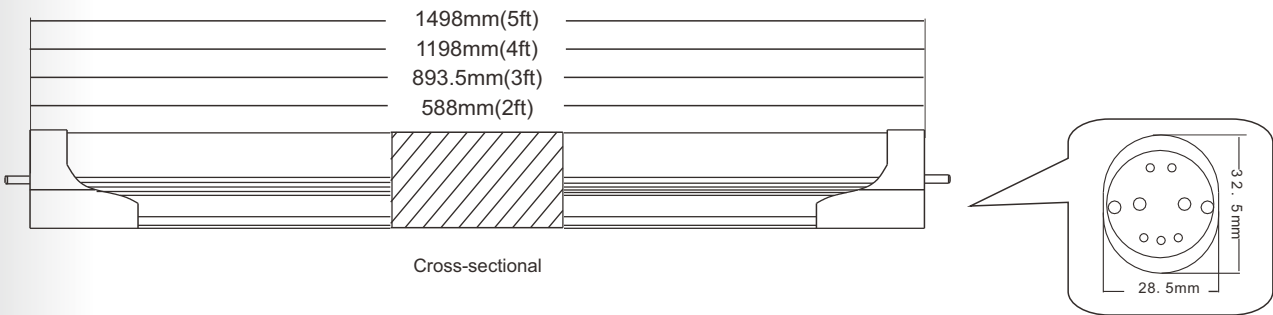

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(Pcs)
LT-I0609-MW-MS-BT	100~240	9	600	50000	3000/4000/6500	120	>80	25
LT-I0912-MW-MS-BT	100~240	12	900	50000	3000/4000/6500	120	>80	25
LT-I1218-MW-MS-BT	100~240	18	1200	50000	3000/4000/6500	120	>80	25
LT-I1522-MW-MS-BT	100~240	22	1500	50000	3000/4000/6500	120	>80	25


- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) >0.9, 總諧波指數THD<15%, 可按客戶需要生產低總諧波指數< 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為Exemption Group及其它測試, 保證客戶使用更安心滿意

WiFi IOT LED T8 Tube

Series Type: WIFI

Features 產品特點 >>

- WiFi adopts wireless technologies such as fast frequency hopping and time division multiple access to replace cables
- A low-cost and low-power wireless access method is provided
- Dimming Signal : wifi
- Dimming Range: 0-100%
- WiFi採用快速跳頻、時分多址等無線技術替代有線
- 提供了一種低成本、低功耗的無線接入方法
- 調光訊號：wifi
- 調光範圍：0-100%

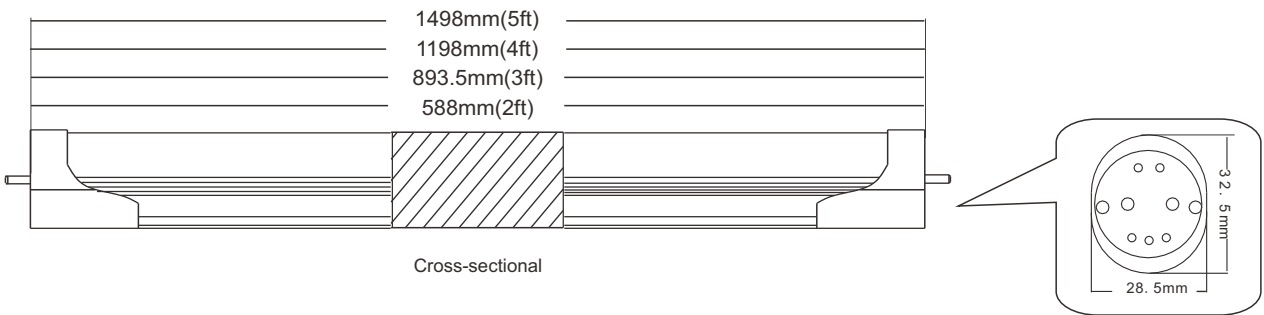

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(Pcs)
LT-I0609-WIFI128A	100~240	9	600	50000	3000/4000/6500	120	>80	25
LT-I0912-WIFI128A	100~240	12	900	50000	3000/4000/6500	120	>80	25
LT-I1218-WIFI128A	100~240	18	1200	50000	3000/4000/6500	120	>80	25
LT-I1522-WIFI128A	100~240	22	1500	50000	3000/4000/6500	120	>80	25

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9，總諧波指數 THD < 15%，可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為 Exemption Group 及其它測試，保證客戶使用更安心滿意

Special Purpose Lighting



特殊用途照明

Compatible Electronic Ballast LED T8/T5 Tube

Series Type: C

Features 產品特點 >>

- Do not apply directly to AC220V
- Uniform light emission, High luminous output
- Retrofit to existing T5 lights without rewiring
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
- T5 body G5 Pin
- Compatible with most emergency battery brands
- 不可直接應用在市電AC220V
- 發光均勻,高流明輸出
- 對現有T5燈進行改造,無需重新佈線
- SPM設計即電源電路保護,在故障時可立即切斷單個LED电路
- T5主體G5銷
- 與大多數應急電池品牌相容

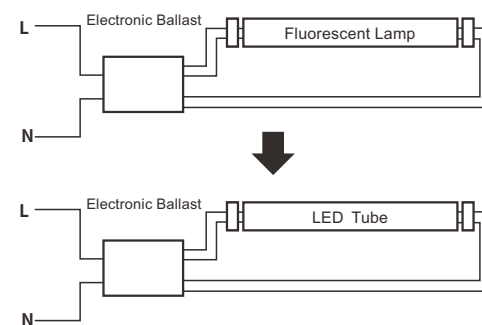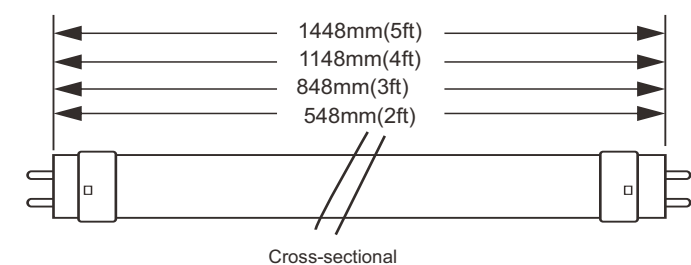

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-I0609-C128A	Electronic ballast	9	600	50000	3000/4000/6500	120	>80	T5,G5	25
LT-I0912-C128A	Electronic ballast	12	900	50000	3000/4000/6500	120	>80	T5,G5	25
LT-I1218-C128A	Electronic ballast	18	1200	50000	3000/4000/6500	120	>80	T5,G5	25
LT-I1522-C128A	Electronic ballast	22	1500	50000	3000/4000/6500	120	>80	T5,G5	25


- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) >0.9, 總諧波指數THD<15%, 可按客戶需要生產低總諧波指數< 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為Exemption Group及其它測試, 保證客戶使用更安心滿意

Universal Compatible LED T8/T5 Tube

Series Type: UC

Features 產品特點 >>

- Can be directly to AC220V
- Uniform light emission
- Retrofit to existing T8 lights without rewiring
- Compatible to use with various electronic ballasts
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
- 可以直接應用在市電AC220V
- 發光均勻
- 對現有T8燈進行改造,無需重新佈線
- 適用於各種電子鎮流器
- SPM設計即電源電路保護,在故障時可立即切斷單個LED电路

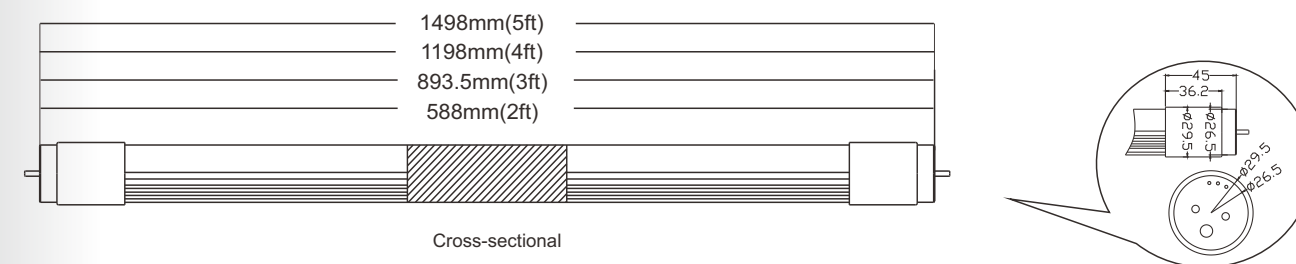

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-I0609-UC128A	100~240	9	600	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I0912-UC128A	100~240	12	900	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1218-UC128A	100~240	18	1200	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1522-UC128A	100~240	22	1500	50000	3000/4000/6500	120	>80	T8,G13	25


- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) >0.9, 總諧波指數THD<15%, 可按客戶需要生產低總諧波指數< 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為Exemption Group及其它測試, 保證客戶使用更安心滿意

Textile LED T8 Tube

Series Type: T

Features 產品特點 >>

- Uniform light emission
 - Retrofit to existing T8 lights on EM
 - SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
 - A textile mill that distinguishable different colors of cloth
- 發光均勻
 - 對現有T8燈進行改進
 - SPM設計即電源電路保護, 在故障時可立即切斷單個LED电路
 - 能分辨不同顏色布料的紡織廠

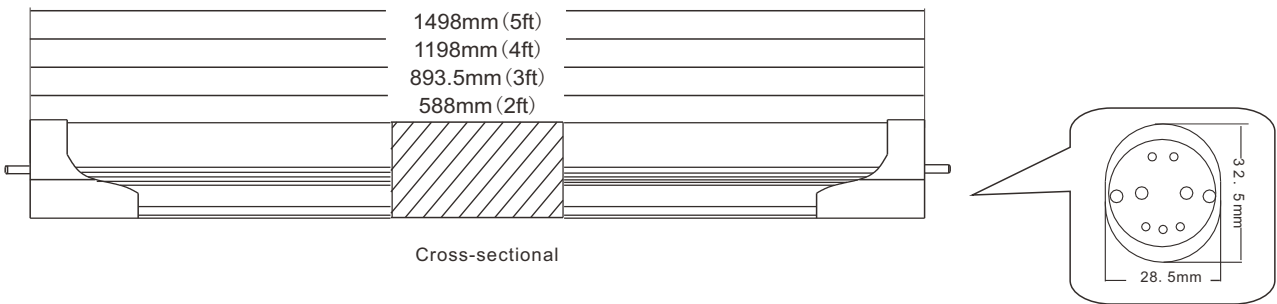

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-I0609-T128A	100~240	9	600	50000	3000/4000/6000	120	>80	T8,G13	25
LT-I0912-T128A	100~240	12	900	50000	3000/4000/6000	120	>80	T8,G13	25
LT-I1218-T128A	100~240	18	1200	50000	3000/4000/6000	120	>80	T8,G13	25
LT-I1522-T128A	100~240	22	1500	50000	3000/4000/6000	120	>80	T8,G13	25


- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
 - Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
 - This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI) , 可根據客戶需求定制
 - 此型號標準之功率因素 (PF)>0.9, 總諧波指數THD<15%, 可按客戶需要生產低總諧波指數< 10%
 - 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS) , 光生物安全為Exemption Group及其它測試, 保證客戶使用更安心滿意

DMX512-RGBW LED T8/T5 Tube

Series Type: DMX-RGB

Features 產品特點 >>

- Exceptional even illumination (LED spot not seen)
 - Control Protocol : DMX512 Control RGB +W
 - RGB+W Dimmable & Multi-Color change
 - Application: Show cabinet, Retail chop, many other applications as appropriate
- 照明均勻 (看不到LED斑點)
 - 控制協定: DMX512控制RGB+W
 - RGB+W可調光和多色變化
 - 產品應用: 展示櫃, 零售印章, 等其他適用場合

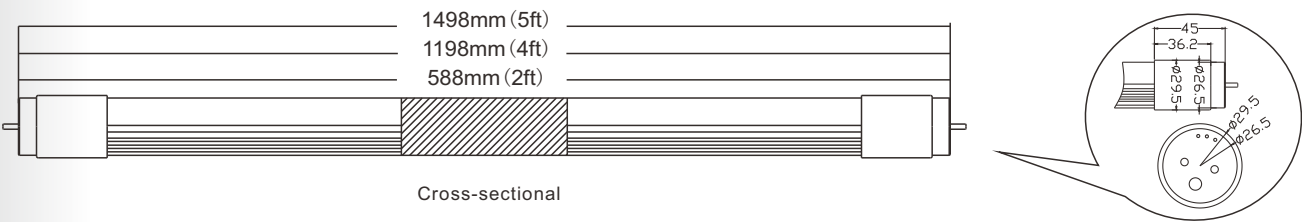

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-R0609-DMX129A-RGB	30-42	9	600	50000	Mixing Color	120	>90	T8,G13	25
LT-R1218-DMX129A-RGB	30-42	18	1200	50000	Mixing Color	120	>90	T8,G13	25
LT-R1522-DMX129A-RGB	30-42	22	1500	50000	Mixing Color	120	>90	T8,G13	25


- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
 - Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
 - This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI) , 可根據客戶需求定制
 - 此型號標準之功率因素 (PF)>0.9, 總諧波指數THD<15%, 可按客戶需要生產低總諧波指數< 10%
 - 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS) , 光生物安全為Exemption Group及其它測試, 保證客戶使用更安心滿意

Negative ion LED T8 Tube

Series Type: NI

Features 產品特點 >>

- Uniform light emission ,Retrofit to existing T8 lights on EM
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
- Optional: rotary end knob for angle adjustment
- Function: in addition to formaldehyde in addition to the smoke dust removal of sterilization and oxygen
- Can be used in Car Park,garbage room
- 發光均勻, 對現有的T8燈進行改造
- SPM設計即電源電路保護, 在故障時可立即切斷單個LED電路
- 可選: 角度調節旋鈕
- 功能: 除甲醛外還具有除煙塵、殺菌和除氧作用
- 可用於停車場、垃圾房

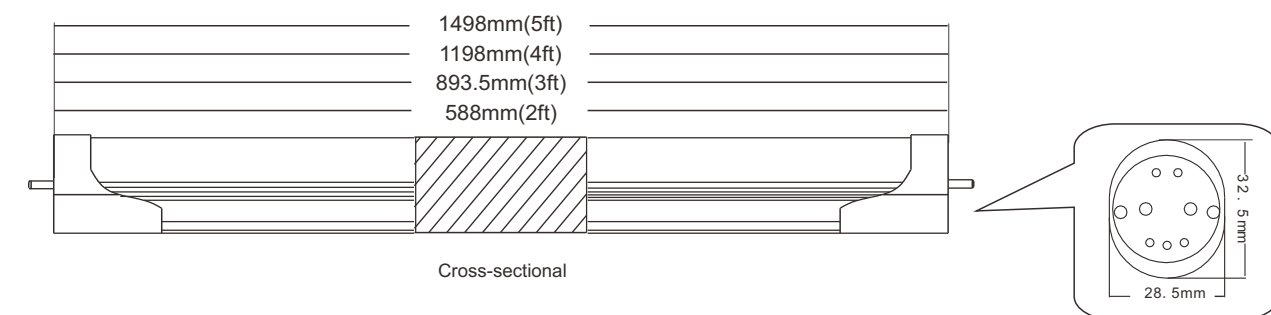

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-I0609-NI128A	100~240	9	600	50000	3000/4000/6000	120	>80	T8,G13	25
LT-I0912-NI128A	100~240	12	900	50000	3000/4000/6000	120	>80	T8,G13	25
LT-I1218-NI128A	100~240	18	1200	50000	3000/4000/6000	120	>80	T8,G13	25
LT-I1522-NI128A	100~240	22	1500	50000	3000/4000/6000	120	>80	T8,G13	25


- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為Exemption Group及其它測試, 保證客戶使用更安心滿意

Mosquito Repellent LED T8 Tube-Ultra Sonic

Series Type: RP

Features 產品特點 >>

- Ultra sonic mosquito repellent with T8 LED Tube
- Enjoy a peaceful night's sleep
- No Chemical, Smell, Sprays, Fumes
- Covers up to 20 square meters
- Sound will no be audible to the user
- T8LED管超聲波驅蚊器
- 享受一個寧靜的夜晚
- 無化學品、氣味、噴霧、煙霧
- 作用範圍20平方米
- 工作時用戶聽不到任何聲音

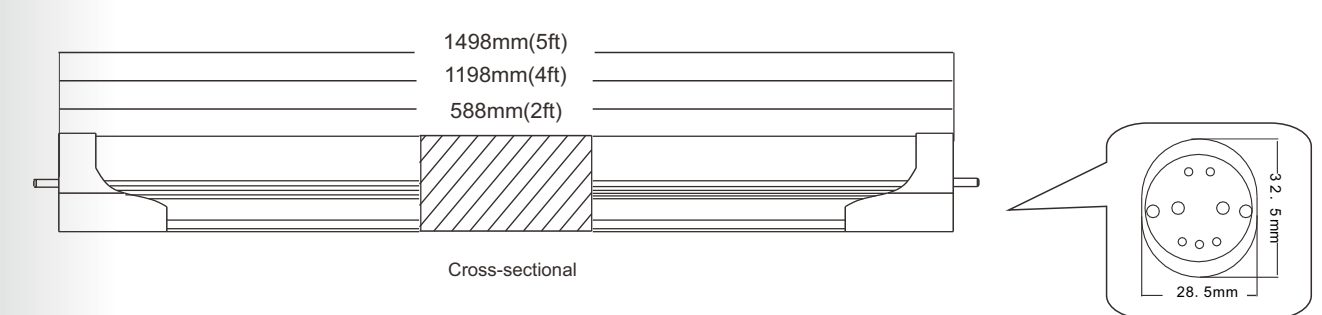

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-I0609-RP128A	100~240	9	600	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1218-RP128A	100~240	18	1200	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1522-RP128A	100~240	22	1500	50000	3000/4000/6500	120	>80	T8,G13	25


- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為Exemption Group及其它測試, 保證客戶使用更安心滿意

UV LED T8 Tube

Series Type: UV

Features 產品特點 >>

- Uniform light emission
- SPM Design – power circuit protection to cut off individual LEDs when mal-functioned
- The uv-proof lamp tube can filter out the light wave below 500nm, and the uv-free light band is output
- Optional: rotary end knob for angle adjustment
- 發光均勻
- SPM設計即電源電路保護, 在故障時可立即切斷單個LED电路
- 防紫外线灯管可过滤掉500nm以下的光波, 无紫外线光波段输出
- 可選配: 角度調節旋鈕

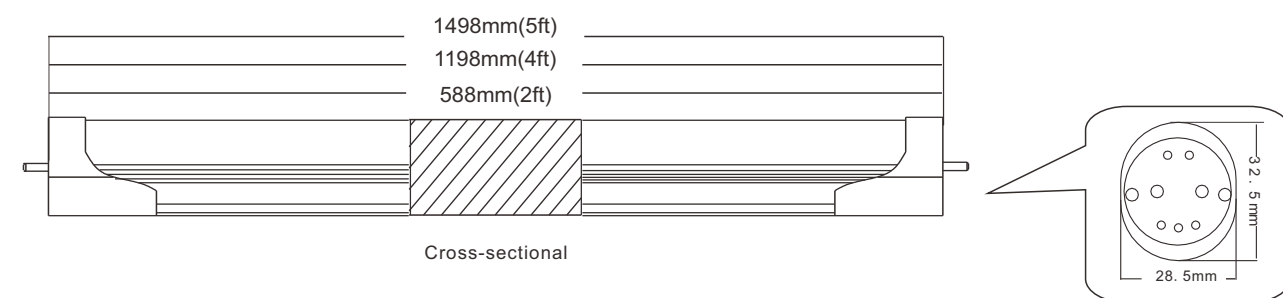

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Length 長度	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Lamp Base 燈腳	Pcs/Box 每箱數量
	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)		(Pcs)
LT-I0609-UV128A	100~240	9	600	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1218-UV128A	100~240	18	1200	50000	3000/4000/6500	120	>80	T8,G13	25
LT-I1522-UV128A	100~240	22	1500	50000	3000/4000/6500	120	>80	T8,G13	25


- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意

LED Driver

LED驱动器

LED External Driver

Series Type: LD-LT




Model:DC-LT20



Model:LD-LT40(1 to 2 output)

Features 產品特點 >>

- Compliant with Safety Extra Low Voltage Standard
- Short circuit/over-temperature/over load /over voltage Protection Non-dimmable external driver
- Flicker free
- Low THD < 10%
- 符合安全特低電壓標準
- 短路/過熱/超載/過壓保護不可調光外部驅動器
- 無閃爍
- 低THD<10%

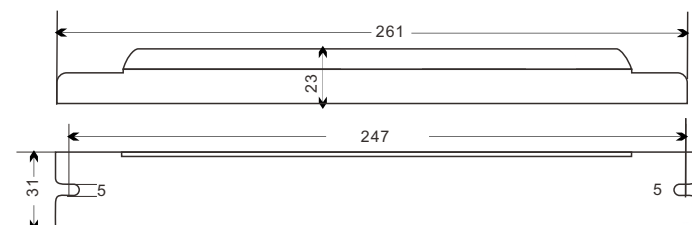

Specification 產品規格 >>

Model 型號	Input Voltage 輸入電壓	Output Voltage 輸出電壓	Wattage 功率	Life 壽命	Max operating temperature 最高工作溫度	Ambient temperature 環境溫度	Standard size 標準尺寸	Pcs/Box 每箱數量
	(V)	(V)	(W)	(Hrs)	(°C)	(°C)	(mm)	(Pcs)
LD-LT20	100~240	30~42	9	50000	45	-20~45	261*31*23	25
LD-LT20	100~240	30~42	18	50000	45	-20~45	261*31*23	25
LD-LT40	100~240	30~42	2*9	50000	45	-20~45	261*31*23	25
LD-LT40	100~240	30~42	2*18	50000	45	-20~45	261*31*23	25

Phase Control TRIAC Dimming Driver


Series Type: DC-CN



Model:DC-CN-24CP

Features 產品特點 >>

- Dimming interface : TRIAC
- Adjusts brightness by varying the voltage supplied to tube
- For smooth dimming
- Dimming range from 0-100%
- 調光介面: TRIAC
- 通過改變供給管的電壓來調節亮度
- 用於平滑調光
- 調光範圍0-100%

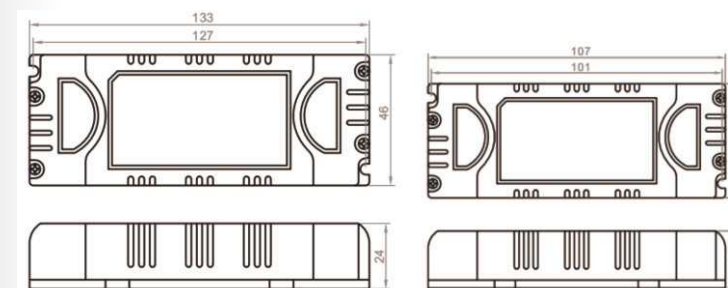

Specification 產品規格 >>

Model 型號	Input Voltage 輸入電壓	Output Voltage 輸出電壓	Wattage 功率	Life 壽命	Max operating temperature 最高工作溫度	Ambient temperature 環境溫度	Standard size 標準尺寸	Pcs/Box 每箱數量
	(V)	(V)	(W)	(Hrs)	(°C)	(°C)	(mm)	(Pcs)
DC-CN-24CP	220-240	30~42	18	50000	45	-20~45	133*46*24	25
DC-CN-22CP	220-240	30~42	18	50000	45	-20~45	107*41*22	25

0-10V Dimming Control Driver


Series Type: DIM-010



Model :DC-LT12-DIM-010

Features 產品特點 >>

- Dimming interface :0-10V Dim
- Dimming range from 0-100%
- Apply to leading edge and trailing edge 0-10V dimmers
- Compliant with safety extra low voltage standard
- THD<15%
- 調光介面:0-10V
- 調光調光範圍0-100%
- 適用於前緣和後緣0-10V調光器
- 符合安全特低電壓標準THD<15%

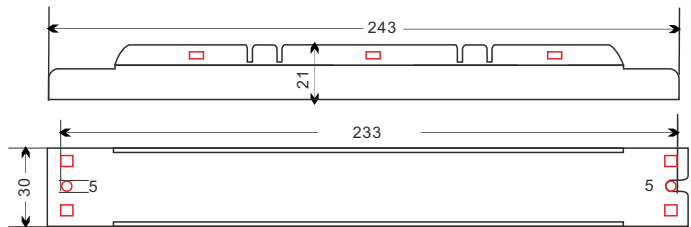

Specification 產品規格 >>

Model 型號	Input Voltage 輸入電壓	Output Voltage 輸出電壓	Wattage 功率	Life 壽命	Max operating temperature 最高工作溫度	Ambient temperature 環境溫度	Standard size 標準尺寸	Pcs/Box 每箱數量
DC-LT12-DIM-010	(V)	(V)	(W)	(Hrs)	(°C)	(°C)	(mm)	(Pcs)
DC-LT12-DIM-010	85~265	30~42	8~40	50000	45	-20~45	243*30*21	25

DALI LED Dimming Driver


Series Type: DC-CN



Model:DC-CN-12CP Order code : DC-CN-12CP-1x8W
Model:DC-CN-24CP Order code : DC-CN-24CP-1x16.5W

Features 產品特點 >>

- Dimming interface protocol : DALI
- Constant current output, parameters can be customized to 8W to 16.5W(or up)
- Class 2 LED power supply, Double-isolated
- Short circuit, over current and over voltage protection Efficiency up to 83%
- DALI control input<2mA,5-100% logarithmic dimming range
- Compatible with many kinds of dimming system, such as Philips, Osram, Tridonic, Siemens, Lutron, KNX etc.
- 調光介面協定: DALI恒流輸出, 參數可定制為8W至16.5W (或以上)
- 2級LED電源, 雙隔離
- 短路、過流、過壓保護效率高達83%
- DALI控制輸入<2mA, 對數調光範圍5-100%
- 與hilips、歐司朗、Tridonic、西門子、路創、KNX等多種調光系統相容。

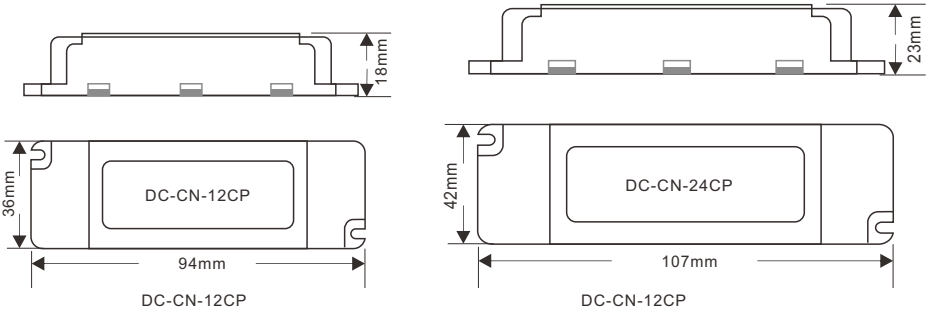

Specification 產品規格 >>

Model 型號	Input Voltage 輸入電壓	Output Voltage 輸出電壓	Wattage 功率	Life 壽命	Max operating temperature 最高工作溫度	Ambient temperature 環境溫度	Standard size 標準尺寸	Pcs/Box 每箱數量
DC-CN-12CP	(V)	(V)	(W)	(Hrs)	(°C)	(°C)	(mm)	(Pcs)
DC-CN-12CP	220-240	30~42	8	50000	45	-20~45	94*36*18	25
DC-CN-24CP	220-240	30~42	16.5	50000	45	-20~45	107*42*23	25

LED PLC Tube



Series Type: IPL-C05



Flick Free
(無閃頻)
保護視力

Features 產品特點 >>

- Energy saving: It save 80% energy than traditional incandescent bulb
- Eco-Green: No radiation, no mercury, no lead, no harmful elements, all products can be recycled
- Long life span: 50,000 hours, 10 times over than traditional light
- High light Efficiency: The product can reach, 120lm/W
- It is safe and easy to be used and installed
- This product is good for workshop, office, bank, hospital, shopping centre, subway, school, and other indoor places which require light of high luminosity and energy-saving
- 節能: 比傳統白熾燈泡節能80%
- 生態綠色: 無輻射、無汞、無鉛、無有害元素, 所有產品均可回收利用
- 壽命長: 使用壽命50000小時, 是傳統光源的10倍
- 高光效: 產品可達120lm/W
- 它很安全, 易於使用和安裝
- 本產品適用於車間、辦公室、銀行、醫院、商場、捷運、學校等要求高亮度、節能的室內場所

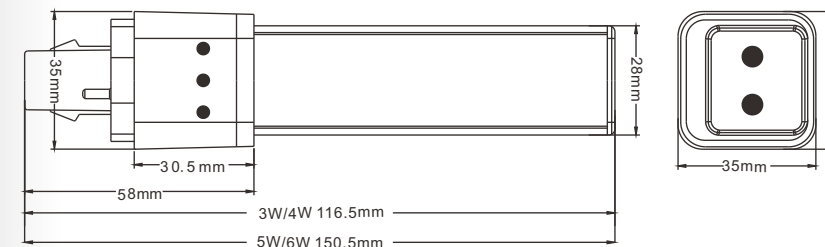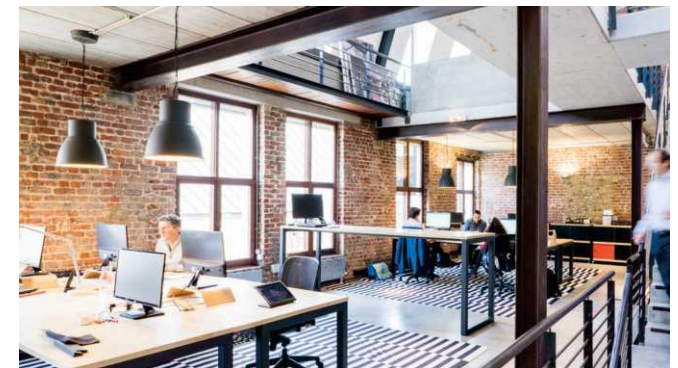

Specification 產品規格 >>

Model 型號	Voltage 電壓 (V)	Wattage 功率 (W)	Standard size 標準尺寸 (mm)	Lamp Life 光度壽命 (Hrs)	Colour Temp 色溫 (K)	Lumen Output 輸出流明 (Lm/W)	Color Rendering 顯色度 (CRI)	Operating Temperature 工作溫度 (°C)	Lamp Base 燈腳	Pcs/Box 每箱數量 (Pcs)
IPL-C03-H128A	85~265	3	35*35*116.5	50000	3000/4000/6500	120	>80	-20~40	G24	25
IPL-C04-H128A	85~265	4	35*35*116.5	50000	3000/4000/6500	120	>80	-20~40	G24	25
IPL-C05-H128A	85~265	5	35*35*150.5	50000	3000/4000/6500	120	>80	-20~40	G24	25
IPL-C06-H128A	85~265	6	35*35*150.5	50000	3000/4000/6500	120	>80	-20~40	G24	25

- Light efficiency (lm/W), Power (W), Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD < 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances (RoHS), Photobiological safety of lamps and lamp systems. (an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI), 可根據客戶需求定制
- 此型號標準之功率因素 (PF) > 0.9, 總諧波指數 THD < 15%, 可按客戶需要生產低總諧波指數 < 10%
- 此型號認證由可實驗室發出之安全認證消防測試, 環保物料 (RoHS), 光生物安全為 Exemption Group 及其它測試, 保證客戶使用更安心滿意

PL Tube Series

橫插燈系列


LED PLS Tube

Series Type: IPL-S04

Features 產品特點 >>

- Energy saving: It save 80% energy than traditional incandescent bulb
- Eco-Green: No radiation, no mercury, no lead, no harmful elements, all products can be recycled
- Long life span: 50,000 hours, 10 times over than traditional light
- High light Efficiency: The product can reach,120lm/W
- It is safe and easy to be used and installed
- This product is good for workshop, office, bank, hospital, shopping centre , subway, school, and other indoor places which require light of high luminosity and energy-saving

- 節能：比傳統白熾燈泡節能80%
- 生態綠色：無輻射、無汞、無鉛、無有害元素，所有產品均可回收利用
- 壽命長：使用壽命50000小時，是傳統光源的10倍
- 高光效：產品可達120lm/W
- 它很安全，易於使用和安裝
- 本產品適用於車間、辦公室、銀行、醫院、商場、捷運、學校等要求高亮度、節能的室內場所

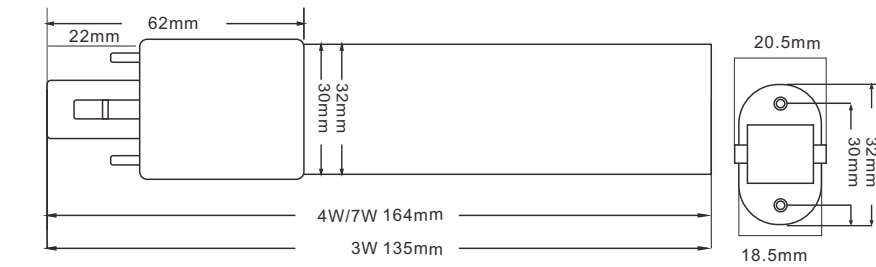

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Standard size 標準尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Operating Temperature 工作溫度	Lamp Base 燈腳	Pcs/Box 每箱數量
(V)	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(°C)		(Pcs)
IPL-S03-H128A	85~265	3	32*30*135	50000	3000/4000/6500	120	>80	-20~40	G23	25
IPL-S04-H128A	85~265	4	32*30*165	50000	3000/4000/6500	120	>80	-20~40	G23	25
IPL-S07-H128A	85~265	7	32*30*165	50000	3000/4000/6500	120	>80	-20~40	G23	25

- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制
- 此型號標準之功率因素 (PF)>0.9，總諧波指數THD<15%，可按客戶需要生產低總諧波指數< 10%
- 此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為Exemption Group及其它測試，保證客戶使用更安心滿意


LED PLL Tube

Series Type: IPL-L0208

Features 產品特點 >>

- Energy saving: It save 80% energy than traditional incandescent bulb
- Eco-Green: No radiation, no mercury, no lead, no harmful elements, all products can be recycled
- Long life span: 50,000 hours, 10 times over than traditional light
- High light Efficiency: The product can reach,120lm/W
- It is safe and easy to be used and installed
- This product is good for workshop, office, bank, hospital, shopping centre , subway, school, and other indoor places which require light of high luminosity and energy-saving

- 節能：比傳統白熾燈泡節能80%
- 生態綠色：無輻射、無汞、無鉛、無有害元素，所有產品均可回收利用
- 壽命長：使用壽命50000小時，是傳統光源的10倍
- 高光效：產品可達120lm/W
- 它很安全，易於使用和安裝
- 本產品適用於車間、辦公室、銀行、醫院、商場、捷運、學校等要求高亮度、節能的室內場所

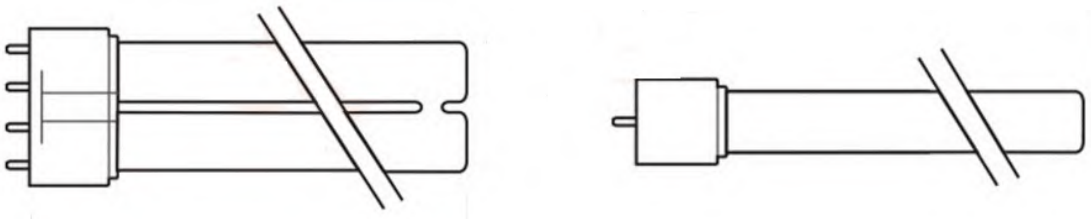

Specification 產品規格 >>

Model 型號	Voltage 電壓	Wattage 功率	Standard size 標準尺寸	Lamp Life 光度壽命	Colour Temp 色溫	Lumen Output 輸出流明	Color Rendering 顯色度	Operating Temperature 工作溫度	Lamp Base 燈腳	Pcs/Box 每箱數量
(V)	(V)	(W)	(mm)	(Hrs)	(K)	(Lm/W)	(CRI)	(°C)		(Pcs)
IPL-L0208-H128A	85~265	8	43*29*255	50000	3000/4000/6500	120	>80	-20~40	2G11	25
IPL-L0310-H128A	85~265	10	43*29*320	50000	3000/4000/6500	120	>80	-20~40	2G11	25
IPL-L0415-H128A	85~265	15	43*29*410	50000	3000/4000/6500	120	>80	-20~40	2G11	25
IPL-L0520-H128A	85~265	20	43*29*535	50000	3000/4000/6500	120	>80	-20~40	2G11	25

- Light efficiency (lm/W),Power (W),Color Rendering Index (CRI), Can be customized according to customer needs
- Our Standard Power factor (PF) > 0.9 and Total harmonic index THD < 15%, According to customer requirements can produce a lower THD< 10%
- This type of certification is issued by a government-approved laboratory for Safety certification, Fire testing, Restriction of Hazardous Substances(RoHS), Photobiological safety of lamps and lamp systems.(an Exemption Group) and other test certifications to ensure product quality
- 光效 (lm/W)、功率 (W)、顯色指數 (CRI)，可根據客戶需求定制
- 此型號標準之功率因素 (PF)>0.9，總諧波指數THD<15%，可按客戶需要生產低總諧波指數< 10%
- 此型號認證由可實驗室發出之安全認證消防測試，環保物料 (RoHS)，光生物安全為Exemption Group及其它測試，保證客戶使用更安心滿意